



313

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Air Conditioning System	2
Hydraulic System	2
Service Refill Capacities	2
Standards	2
Sound Performance	2
Weights and Ground Pressures	3
Major Component Weights	4
Dimensions	5
Working Ranges and Forces	7
Blade Working Ranges	9
Reach Boom Lift Capacities	10
Variable Angle Boom Lift Capacities	19
Bucket Specifications and Compatibility:	
Europe	54
Australia and New Zealand	57
Attachments Offering Guide:	
Europe	58
Australia and New Zealand	62
Standard and Optional Equipment	63
Dealer Installed Kits and Attachments	65
Cab Options	66

313 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C3.6	
Net Power – ISO 9249:2007	81 kW	108 hp
Engine Power – ISO 14396:2002	82 kW	110 hp
Bore	98 mm	4 in
Stroke	120 mm	5 in
Displacement	3.6 L	220 in ³

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Japan 2014 emission standards.
- No engine power derating required below 3,000 m (9,840) altitude.
- Net power is tested per ISO 9249:2007. Standards in effect at the time of manufacture.
- Net power available at the flywheel when engine is equipped with fan, air cleaner, aftertreatment, and alternator with engine speed at 2,400 rpm.
- Engine speed at 2,400 rpm

Swing Mechanism

Swing Speed	11.5 rpm	
Maximum Swing Torque	35 kN·m	25,741 lbf·ft

Weights

Operating Weight	13 900 kg	30,600 lb
• Long undercarriage, Reach Boom + R3.0 (9'10") stick, GD 0.68 m³ (0.89 yd³) bucket, 700 mm (28") triple grouser shoes and 2.47 mt (5,445 lb) counterweight.		
Operating Weight	13 300 kg	29,300 lb
• Long undercarriage, Reach boom, R2.5 (8'2") stick, GD 0.53 m³ (0.69 yd³) bucket, 500 mm (20") triple grouser shoes and 2.47 mt (5,445 lb) counterweight.		

Track

Optional Track Shoes Width	500 mm	20 in
Optional Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Optional Track Shoes Width	770 mm	30 in
Number of Shoes (each side)	46	
Number of Track Rollers (each side)	7	
Number of Carrier Rollers (each side)	2	

Drive

Gradeability	35°/70%	
Maximum Travel Speed	5.4 km/h	3.4 mph
Maximum Drawbar Pull – Long Undercarriage	117 kN	26,303 lbf

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.85 kg of refrigerant, which has a CO₂ equivalent of 1.216 metric tonne.

Hydraulic System

Main System – Maximum Flow – Implement	247 L/min	65 gal/min
Maximum Pressure – Equipment – Normal	35 000 kPa	5,075 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	26 000 kPa	3,770 psi
Boom Cylinder – Bore	105 mm	4 in
Boom Cylinder – Stroke	1026 mm	40 in
Stick Cylinder – Bore	115 mm	5 in
Stick Cylinder – Stroke	1147 mm	45 in
Bucket Cylinder – Bore	95 mm	4 in
Bucket Cylinder – Stroke	939 mm	37 in

Service Refill Capacities

Fuel Tank Capacity	258 L	68.2 gal
Cooling System	15 L	4 gal
Engine Oil	8 L	2.1 gal
Final Drive (each)	3 L	0.8 gal
Hydraulic System (including tank)	145 L	38.3 gal
Hydraulic Tank	70 L	18.5 gal
DEF Tank	21 L	5.6 gal

Standards

Brakes	ISO 10265:2008
Cab/ROPS	ISO 12117-2:2008
Cab/FOGS	ISO 10262:1998

Sound Performance

ISO 6395:2008 (external)	100 dB(A)
ISO 6396:2008 (inside cab)	66 dB(A)

- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

313 Hydraulic Excavator Specifications

Operating Weights and Ground Pressures

	500 mm (20") Triple Grouser Shoes		500 mm (20") TG Shoe with Rubber Pad		500 mm (20") Rubber Track Shoe		600 mm (24") Triple Grouser Shoes		700 mm (28") Triple Grouser Shoes		770 mm (30") Triple Grouser Shoes	
	Weight	Ground Pressure	Weight		Weight		Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
Base Machine Configurations	kg (lb)	kPa (psi)	kg (lb)		kg (lb)		kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
Base Frame with Track Rollers and Carrier Roller												
2.47 mt (5,445 lb) Counterweight and Long Undercarriage Base Machine												
Reach Boom + R3.0 (9'10") Stick + 0.68 m ³ (0.89 yd ³) GD Bucket	13 400 (29,500)	40.0 (5.8)	13 900 (30,600)		13 500 (29,800)		13 700 (30,200)	34.0 (4.9)	13 900 (30,600)	29.6 (4.3)	14 000 (30,900)	27.1 (4.7)
Variable Angle Boom + R2.2 (7'3") Stick + 0.68 m ³ (0.89 yd ³) GD Bucket	14 100 (31,100)	42.0 (6.1)	14 600 (32,200)		14 200 (31,300)		14 400 (31,700)	35.8 (5.2)	14 600 (32,200)	31.1 (4.5)	14 700 (32,400)	28.5 (4.7)
Reach Boom + R3.0 (9'10") Stick + 0.53 m ³ (0.69 yd ³) GD Bucket**	13 300 (29,300)	39.7 (5.8)	13 800 (30,400)		13 500 (29,800)		13 600 (30,000)	33.8 (4.9)	13 800 (30,400)	29.4 (4.3)	13 900 (30,600)	26.9 (4.7)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

**Australia and New Zealand only

313 Hydraulic Excavator Specifications

Major Component Weights

	kg	lb
Base Machine Weight: including upper frame, undercarriage, counterweight, without boom, stick, bucket, boom cylinders, stick cylinder, bucket cylinders, tracks, blade, without 90% fuel tank, operator		
With Long Undercarriage	9150	20,200
With Long Undercarriage (blade compatible)	9450	20,800
With Long Undercarriage for use with Variable Angle Boom	9230	20,300
With Long Undercarriage (blade compatible) for use with Variable Angle Boom	9530	21,000
Track Shoes:		
500 mm (20") Triple Grouser Track Shoes	1540	3,390
500 mm (20") Triple Grouser Track Shoes with Rubber Pad	2050	4,520
500 mm (20") Rubber Track Shoe	1670	3,680
600 mm (24") Triple Grouser Track Shoes	1810	3,990
700 mm (28") Triple Grouser Track Shoes with Additional Steps	2020	4,450
770 mm (30") Triple Grouser Track Shoes with Additional Steps	2160	4,760
Two Boom Cylinders	240	530
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	270	600
Blades (without lines, cylinders, frame modifications):		
2500 mm (8'2") Blade for use with 500 mm (20") Track Shoes	440	970
2600 mm (8'6") Blade for use with 600 mm (24") Track Shoes	490	1,080
2700 mm (8'10") Blade for use with 700 mm (28") and 770 mm (30") Track Shoes	500	1,100
Counterweight:		
2.47 mt (5,445 lb) Counterweight	2470	5,440
Swing Frame	1240	2,730
Undercarriage:		
Base Frame with Standard Track Rollers and Two Carrier Rollers	2690	5,930
Base Frame with Standard Track Rollers and Two Carrier Rollers (blade compatible)	2980	6,570
Booms (including lines, pins, stick cylinder):		
Reach Boom 4.65 m (15'3")	1030	2,270
Variable Angle Boom (2.4 m [7'8"] Stub + 2.44 [8'0"] Fore)	1590	3,500
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R2.2 (7'3")	620	1,370
Reach Stick R2.2 (7'3") for use with Variable Angle Boom	680	1,500
Reach Stick R2.5 (8'2")	590	1,300
Reach Stick R2.5 (8'2") for use with Variable Angle Boom	660	1,450
Reach Stick R3.0 (9'10")	650	1,430
Buckets (without linkage, with tips and side cutters):		
0.53 m ³ (0.69 yd ³) GD Bucket*	420	930
0.53 m ³ (0.69 yd ³) GD Bucket**	460	1,010
0.68 m ³ (0.89 yd ³) GD Bucket	500	1,100
0.76 m ³ (0.99 yd ³) GD Bucket	520	1,150
Two Bucket Pins	20	40
Quick Coupler:		
Pin Grabber Quick Coupler	210	460


*Europe only

**Australia and New Zealand only

313 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

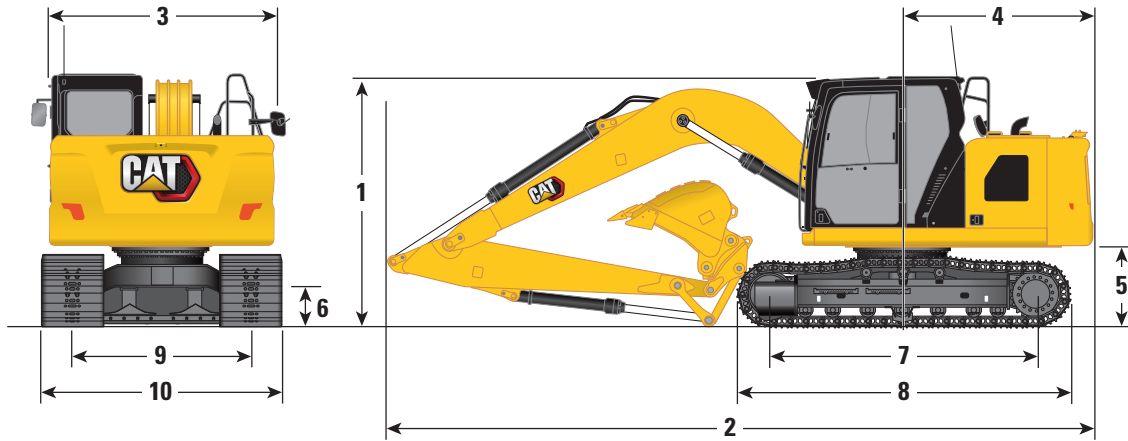

Boom Option

Reach Boom
4.65 m (15'3")

Stick Options

Reach Stick

R2.2 (7'3")

R2.5 (8'2")

R3.0 (9'10")

1 Machine Height:*

Top of Cab Height	2810 mm	9'3"	2810 mm	9'3"	2810 mm	9'3"
Top of FOGS Height	2950 mm	9'8"	2950 mm	9'8"	2950 mm	9'8"
Handrails Height	2810 mm	9'3"	2810 mm	9'3"	2810 mm	9'3"
With Boom/Stick/Bucket Installed (with stick cylinder lines)	2800 mm	9'2"	2890 mm	9'6"	3190 mm	10'6"
With Boom/Stick Installed (with stick cylinder lines)	2800 mm	9'2"	2890 mm	9'6"	3190 mm	10'6"
With Boom Installed (with stick cylinder lines)	2370 mm	7'9"	2370 mm	7'9"	2370 mm	7'9"

2 Machine Length (without blade):

With Boom/Stick/Bucket Installed (with stick cylinder lines)	7680 mm	25'2"	7690 mm	25'3"	7780 mm	25'6"
With Boom/Stick Installed (with stick cylinder lines)	7680 mm	25'2"	7690 mm	25'3"	7780 mm	25'6"
With Boom Installed (with stick cylinder lines)	6890 mm	22'7"	6890 mm	22'7"	6890 mm	22'7"

Machine Length (with blade, blade rear):

With Boom/Stick/Bucket Installed (with stick cylinder lines)	7960 mm	26'1"	7970 mm	26'2"	8050 mm	26'5"
With Boom/Stick Installed (with stick cylinder lines)	7960 mm	26'1"	7970 mm	26'2"	8050 mm	26'5"
With Boom Installed (with stick cylinder lines)	7100 mm	23'4"	7100 mm	23'4"	7100 mm	23'4"

3 Upperframe Width

2480 mm	8'2"	2480 mm	8'2"	2480 mm	8'2"
---------	------	---------	------	---------	------

4 Tail Swing Radius – 2.47 mt (5,445 lb) Counterweight

2190 mm	7'2"	2190 mm	7'2"	2190 mm	7'2"
---------	------	---------	------	---------	------

5 Counterweight Clearance

915 mm	3'0"	915 mm	3'0"	915 mm	3'0"
--------	------	--------	------	--------	------

6 Ground Clearance

445 mm	1'6"	445 mm	1'6"	445 mm	1'6"
--------	------	--------	------	--------	------

7 Length to Center of Rollers

3040 mm	10'0"	3040 mm	10'0"	3040 mm	10'0"
---------	-------	---------	-------	---------	-------

8 Overall Track Length

3750 mm	12'4"	3750 mm	12'4"	3750 mm	12'4"
---------	-------	---------	-------	---------	-------

9 Track Gauge

1990 mm	6'6"	1990 mm	6'6"	1990 mm	6'6"
---------	------	---------	------	---------	------

10 Track Width/Undercarriage Width:

500 mm (20") Shoes	2490 mm	8'2"	2490 mm	8'2"	2490 mm	8'2"
600 mm (24") Shoes	2590 mm	8'6"	2590 mm	8'6"	2590 mm	8'6"
700 mm (28") Shoes (with steps)	2690 mm	8'10"	2690 mm	8'10"	2690 mm	8'10"
770 mm (30") Shoes (with steps)	2760 mm	9'1"	2760 mm	9'1"	2760 mm	9'1"

Bucket Type

GD

GD

GD

Bucket Capacity**

0.68 m ³	0.89 yd ³	0.68 m ³	0.89 yd ³	0.68 m ³	0.89 yd ³
---------------------	----------------------	---------------------	----------------------	---------------------	----------------------

Bucket Tip Radius

1240 mm	4'1"	1240 mm	4'1"	1240 mm	4'1"
---------	------	---------	------	---------	------


*For models with rubber track shoe or rubber pad add 40 mm (1.6") to machine height dimensions.

** 0.53 m³ (0.65 yd³) GD bucket for models sold in Australia and New Zealand.

313 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

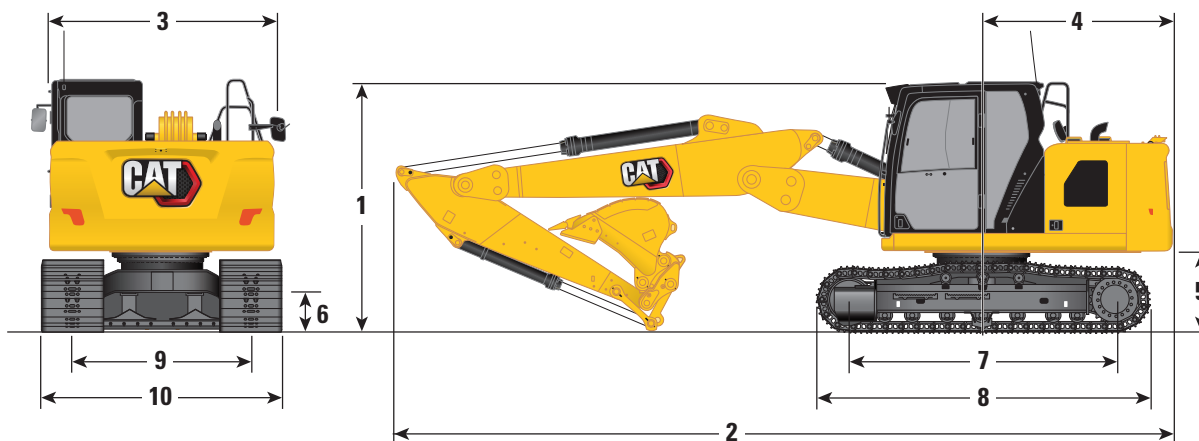

Boom Option

Variable Angle Boom
2.4 m/2.44 m (7'8"/8'0")

Stick Options

Reach Stick

R2.2 (7'3")

R2.5 (8'2")


1 Machine Height:*				
Top of Cab Height	2810 mm	9'3"	2810 mm	9'3"
Top of FOGS Height	2950 mm	9'8"	2950 mm	9'8"
Handrails Height	2810 mm	9'3"	2810 mm	9'3"
With Boom/Stick/Bucket Installed (with stick cylinder lines)	2780 mm	9'1"	2880 mm	9'5"
With Boom/Stick Installed (with stick cylinder lines)	2780 mm	9'1"	2880 mm	9'5"
With Boom Installed (with stick cylinder lines)	2200 mm	7'2"	2200 mm	7'2"
2 Machine Length (without blade):				
With Boom/Stick/Bucket Installed (with stick cylinder lines)	7770 mm	25'6"	7750 mm	25'5"
With Boom/Stick Installed (with stick cylinder lines)	7770 mm	25'6"	7750 mm	25'5"
With Boom Installed (with stick cylinder lines)	6970 mm	22'10"	6970 mm	22'10"
Machine Length (with blade, blade rear):				
With Boom/Stick/Bucket Installed (with stick cylinder lines)	8040 mm	26'5"	8030 mm	26'4"
With Boom/Stick Installed (with stick cylinder lines)	8040 mm	26'5"	8030 mm	26'4"
With Boom Installed (with stick cylinder lines)	7240 mm	23'9"	7240 mm	23'9"
3 Upperframe Width	2480 mm	8'2"	2480 mm	8'2"
4 Tail Swing Radius – 2.47 mt (5,445 lb) Counterweight	2190 mm	7'2"	2190 mm	7'2"
5 Counterweight Clearance	915 mm	3'0"	915 mm	3'0"
6 Ground Clearance	445 mm	1'6"	445 mm	1'6"
7 Length to Center of Rollers	3040 mm	10'0"	3040 mm	10'0"
8 Overall Track Length	3750 mm	12'4"	3750 mm	12'4"
9 Track Gauge	1990 mm	6'6"	1990 mm	6'6"
10 Track Width/Undercarriage Width:				
500 mm (20") Shoes	2490 mm	8'2"	2490 mm	8'2"
600 mm (24") Shoes	2590 mm	8'6"	2590 mm	8'6"
700 mm (28") Shoes (with steps)	2690 mm	8'10"	2690 mm	8'10"
770 mm (30") Shoes (with steps)	2760 mm	9'1"	2760 mm	9'1"
Bucket Type	GD		GD	
Bucket Capacity	0.68 m ³	0.89 yd ³	0.68 m ³	0.89 yd ³
Bucket Tip Radius	1240 mm	4'1"	1240 mm	4'1"

*For models with rubber track shoe or rubber pad add 40 mm (1.6") to machine height dimensions.

313 Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

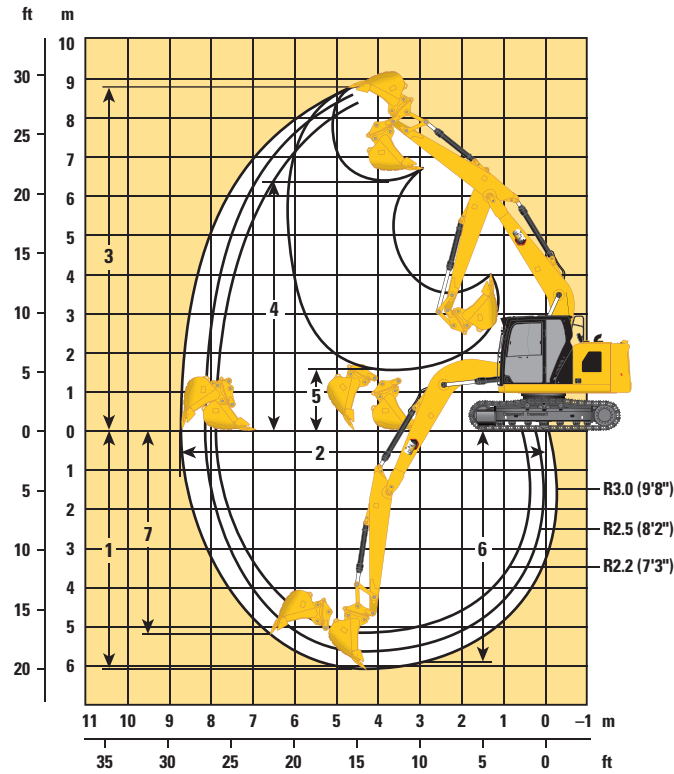


Boom Option		Reach Boom 4.65 m (15'3")					
Stick Options		Reach Stick					
		R2.2 (7'3")		R2.5 (8'2")		R3.0 (9'10")	
1	Maximum Digging Depth	5240 mm	17'2"	5540 mm	18'2"	6040 mm	19'10"
2	Maximum Reach at Ground Line	7910 mm	25'11"	8190 mm	26'10"	8660 mm	28'5"
3	Maximum Cutting Height	8370 mm	27'6"	8560 mm	28'1"	8830 mm	29'0"
4	Maximum Loading Height	5960 mm	19'7"	6150 mm	20'2"	6420 mm	21'1"
5	Minimum Loading Height	2380 mm	7'10"	2080 mm	6'10"	1600 mm	5'3"
6	Maximum Depth Cut for 2440 mm (8'0") Level Bottom	5010 mm	16'5"	5330 mm	17'6"	5860 mm	19'3"
7	Maximum Vertical Wall Digging Depth	4390 mm	14'5"	4760 mm	15'7"	5190 mm	17'0"
Minimum Working Equipment Radius		2460 mm	8'1"	2430 mm	8'0"	2570 mm	8'5"
Bucket Digging Force (ISO)		98.47 kN	22,140 lbf	98.45 kN	22,130 lbf	98.67 kN	22,180 lbf
Stick Digging Force (ISO)		72.85 kN	16,380 lbf	66.68 kN	14,990 lbf	59.29 kN	13,330 lbf
Bucket Type		GD		GD		GD	
Bucket Capacity*		0.68 m ³	0.89 yd ³	0.68 m ³	0.89 yd ³	0.68 m ³	0.89 yd ³
Bucket Tip Radius		1240 mm	4'1"	1240 mm	4'1"	1240 mm	4'1"

* 0.53 m³ (0.65 yd³) GD bucket for models sold in Australia and New Zealand.

313 Hydraulic Excavator Specifications

Working Ranges and Forces


All dimensions are approximate and may vary depending on bucket selection.

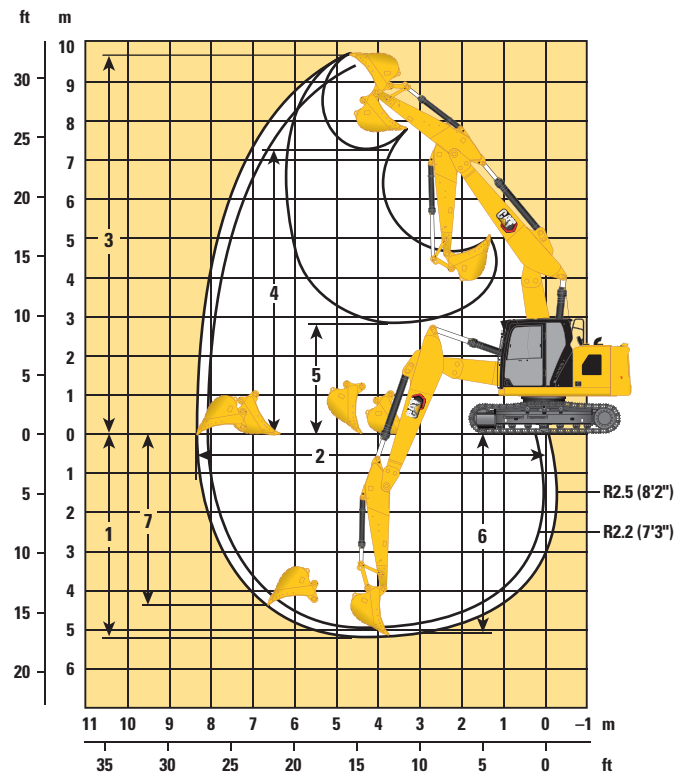

Boom Option		Variable Angle Boom 2.4 m/2.44 m (7'8"/8'0")			
Stick Options		Reach Stick			
		R2.2 (7'3")		R2.5 (8'2")	
1	Maximum Digging Depth	4900 mm	16'1"	5200 mm	17'1"
2	Maximum Reach at Ground Line	8050 mm	26'5"	8340 mm	27'4"
3	Maximum Cutting Height	9440 mm	31'0"	9700 mm	31'10"
4	Maximum Loading Height	6960 mm	22'10"	7230 mm	23'9"
5	Minimum Loading Height	3120 mm	10'3"	2860 mm	9'5"
6	Maximum Depth Cut for 2440 mm (8'0") Level Bottom	4770 mm	15'8"	5080 mm	16'8"
7	Maximum Vertical Wall Digging Depth	3940 mm	12'11"	4270 mm	14'0"
	Minimum Working Equipment Radius	1750 mm	5'9"	1900 mm	6'3"
	Bucket Digging Force (ISO)	98.47 kN	22,140 lbf	98.45 kN	22,130 lbf
	Stick Digging Force (ISO)	72.85 kN	16,380 lbf	66.68 kN	14,990 lbf
	Bucket Type	GD		GD	
	Bucket Capacity	0.68 m ³	0.89 yd ³	0.68 m ³	0.89 yd ³
	Bucket Tip Radius	1240 mm	4'1"	1240 mm	4'1"

Blade Working Ranges

All dimensions are approximate and may vary depending on bucket selection.

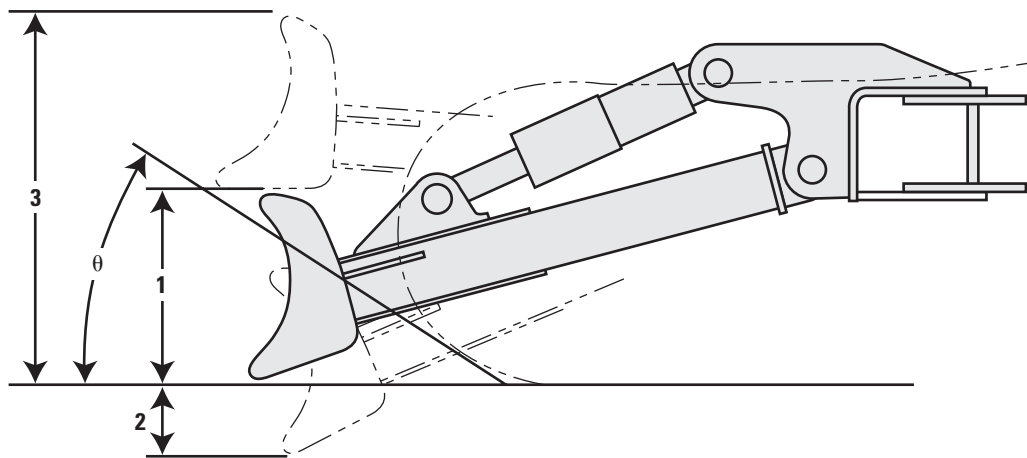

Blade Options	2500 mm (8'2")		2600 mm (8'6")		2700 mm (8'10")	
1 Blade Height	630 mm	2'1"	630 mm	2'1"	630 mm	2'1"
2 Maximum Lowering Depth from Ground	580 mm	1'11"	580 mm	1'11"	580 mm	1'11"
3 Maximum Raising Height above Ground	990 mm	3'3"	990 mm	3'3"	990 mm	3'3"
θ Approach Angle	26°		26°		26°	

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket

500 mm (20") Triple Grouser Shoes

1990 mm (6'6")

3040 mm (9'11")

3750 mm (12'3")

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
6.0 m 20.0 ft	kg lb					*3900 *8,650	*3900 8,400			*3050 *6,750	*3050 *6,750	5.07 16'3"
4.5 m 15.0 ft	kg lb					*4100 *8,850	3850 8,300	*3300	2400	*2800 *6,200	2350 5,200	6.10 19'10"
3.0 m 10.0 ft	kg lb			*6950 *14,900	6750 14,550	*4900 *10,550	3650 7,850	3650 7,800	2350 5,050	*2800 *6,150	2000 4,400	6.64 21'8"
1.5 m 5.0 ft	kg lb					5500 11,800	3400 7,300	3550 7,600	2250 4,850	2950 6,400	1900 4,100	6.81 22'4"
0 m 0 ft	kg lb			*6050 *14,050	5850 12,500	5300 11,350	3250 6,950	3450 7,400	2200 4,700	3000 6,550	1900 4,200	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	5850 12,500	5250 11,250	3200 6,850	3450	2200	3350 7,450	2150 4,700	6.10 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	5950 12,800	*5250 *11,200	3250 7,000			*4400 *9,650	2800 6,250	5.06 16'5"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket

500 mm (20") Rubber Track Shoe

1990 mm (6'6")

3040 mm (9'11")

3750 mm (12'3")

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
6.0 m 20.0 ft	kg lb					*3900 *8,650	*3900 *8,400			*3050 *6,750	*3050 *6,750	5.07 16'7"
4.5 m 15.0 ft	kg lb					*4100 *8,850	*3850 *8,300	*3300	2400	*2800 *6,200	2350 5,200	6.10 20'0"
3.0 m 10.0 ft	kg lb			*6950 *14,900	*6750 *14,550	*4900 *10,550	3650 7,850	3650 7,800	2350 5,050	*2800 *6,150	2000 4,400	6.64 21'9"
1.5 m 5.0 ft	kg lb					5500 11,800	3400 7,300	3550 7,600	2250 4,850	2950 6,400	1900 4,100	6.81 22'4"
0 m 0 ft	kg lb			*6050 *14,050	5850 12,500	5300 11,350	3250 6,950	3450 7,400	2200 4,700	3000 6,550	1900 4,200	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	5850 12,500	5250 11,250	3200 6,850	3450	2200	3350 7,450	2150 4,700	6.10 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	5950 12,800	*5250 *11,200	3250 7,000			*4400 *9,650	2800 6,250	5.06 16'7"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
											
6.0 m 20.0 ft	kg lb				*3900 *8,650	*3900 8,550			*3050 *6,750	*3050 *6,750	5.07 16'3"
4.5 m 15.0 ft	kg lb				*4100 *8,850	3900 8,400	*3300 2450		*2800 *6,200	2400 5,300	6.10 19'10"
3.0 m 10.0 ft	kg lb		*6950 *14,900	6900 14,800	*4900 *10,550	3700 8,000	3700 7,950	2400 5,150	*2800 *6,150	2050 4,500	6.64 21'8"
1.5 m 5.0 ft	kg lb				5600 12,000	3450 7,450	3600 7,750	2300 4,950	*2950 *6,500	1900 4,200	6.81 22'4"
0 m 0 ft	kg lb		*6050 *14,050	5950 12,750	5400 11,600	3300 7,100	3500 7,550	2250 4,800	3050 6,700	1950 4,250	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	5950 12,750	5350 11,450	3250 7,000	3500	3450 7,600	2200 4,800	6.10 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6100 13,050	*5250 *11,200	3300 7,150		*4400 *9,650	2850 6,350	5.06 16'5"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
											
6.0 m 20.0 ft	kg lb				*3,900 *8,650	*3,900 8,650			*3,050 *6,750	*3,050 *6,750	5.07 16'3"
4.5 m 15.0 ft	kg lb				*4,100 *8,850	3,950 8,500	*3,300 2,500		*2,800 *6,200	2,450 5,400	6.10 19'10"
3.0 m 10.0 ft	kg lb		*6,950 *14,900	6,950 *14,900	*4,900 *10,550	3,750 8,100	3,750 8,100	2,450 5,250	*2,800 *6,150	2,100 4,550	6.64 21'8"
1.5 m 5.0 ft	kg lb				5,650 12,150	3,500 7,550	3,650 7,850	2,350 5,050	*2,950 *6,500	1,950 4,250	6.81 22'4"
0 m 0 ft	kg lb		*6,050 *14,050	6,000 12,900	5,500 11,750	3,350 7,200	3,600 7,700	2,250 4,850	3,100 6,800	2,000 4,350	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5,100 *11,450	*5,100 *11,450	*9,300 *20,150	6,050 12,950	5,450 11,650	3,300 7,100	3,550	3,500 7,700	2,200 4,850	6.10 19'11"
-3.0 m -10.0 ft	kg lb			*7,700 *16,600	6,150 13,200	*5,250 *11,200	3,350 7,250		*4,400 *9,650	2,900 6,450	5.06 16'5"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
											
6.0 m 20.0 ft	kg lb				*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.07 16'3"
4.5 m 15.0 ft	kg lb				*4100 *8,850	4000 8,600	*3300 2500		*2800 *6,200	2450 5,450	6.10 19'10"
3.0 m 10.0 ft	kg lb		*6950 *14,900	*6950 *14,900	*4900 *10,550	3800 8,150	3800 5,300	2450 5,300	*2800 *6,150	2100 4,600	6.64 21'8"
1.5 m 5.0 ft	kg lb				5750 12,300	3550 7,650	3700 7,950	2350 5,100	*2950 *6,500	1950 4,300	6.81 22'4"
0 m 0 ft	kg lb		*6050 *14,050	*6050 13,050	5550 11,900	3400 7,300	3600 7,750	2300 4,900	3150 6,900	2000 4,400	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	6100 13,050	5500 11,750	3350 7,150	3600 7,750	3550 7,750	2250 4,900	6.10 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6200 13,350	*5250 *11,200	3400 7,350		*4400 *9,650	2950 6,500	5.06 16'5"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
											
6.0 m 20.0 ft	kg lb				*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb				*3800 *8,300	*3800 *8,300	*3650 *7,400	2500 5,300	*2450 *5,350	2200 4,900	6.41 20'10"
3.0 m 10.0 ft	kg lb		*6400 *13,700	*6400 *13,700	*4650 *10,100	3700 8,000	3700 7,900	2400 5,150	*2450 *5,300	1900 4,200	6.93 22'8"
1.5 m 5.0 ft	kg lb		*7350 *18,000	6200 13,350	5550 11,950	3450 7,450	3600 7,700	2300 4,950	*2550 *5,600	1800 3,950	7.09 23'3"
0 m 0 ft	kg lb		*6500 *15,000	5900 12,650	5350 11,500	3300 7,050	3500 7,450	2200 4,750	2850 6,200	1800 4,000	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	5850 12,550	5250 11,300	3200 6,900	3450 7,400	3150 6,950	2000 4,400	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	5950 12,800	5300 11,400	3250 7,000		4050 8,950	2550 5,650	5.43 17'8"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2550 5,450	*2450 *5,350	2300 5,050	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	3850 8,250	3800 8,200	2500 5,350	*2450 *5,300	2000 4,350	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	6400 13,800	*5700 *12,250	3600 7,700	3700 7,950	2400 5,100	*2550 *5,600	1850 4,100	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	6100 13,100	5550 11,900	3400 7,300	3600 7,750	2300 4,950	*2850 *6,250	1900 4,150	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6050 13,000	5450 11,700	3350 7,150	3600 7,700	2250 4,850	3250 7,200	2100 4,600	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6150 13,250	5500 11,850	3350 7,250			4200 9,300	2650 5,850	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2500 5,350	*2450 *5,350	2250 4,950	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	3750 8,050	3700 8,000	2450 5,200	*2450 *5,300	1950 4,250	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	6250 13,450	5600 12,050	3500 7,500	3600 7,750	2300 5,000	*2550 *5,600	1800 3,950	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	5950 12,750	5400 11,600	3300 7,100	3500 7,550	2250 4,800	*2850 *6,250	1850 4,000	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	5900 12,650	5300 11,400	3250 6,950	3500 7,450	2200 4,750	3200 7,000	2050 4,450	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6000 12,900	5350 11,500	3300 7,050			4050 9,050	2550 5,700	5.43 17'8"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



313 Hydraulic Excavator Specifications


Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
											
6.0 m 20.0 ft	kg lb				*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb				*3800 *8,300	*3800 *8,300	*3650 *7,400	2500 5,400	*2450 *5,350	2250 5,000	6.41 20'10"
3.0 m 10.0 ft	kg lb		*6400 *13,700	*6400 *13,700	*4650 *10,100	3800 8,150	3750 8,050	2450 5,250	*2450 *5,300	1950 4,300	6.93 22'8"
1.5 m 5.0 ft	kg lb		*7350 *18,000	6300 13,600	5650 12,150	3550 7,600	3650 7,800	2350 5,050	*2550 *5,600	1850 4,000	7.09 23'3"
0 m 0 ft	kg lb		*6500 *15,000	6000 12,900	5450 11,700	3350 7,200	3550 7,600	2250 4,850	*2850 *6,250	1850 4,050	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	5950 12,800	5350 11,500	3300 7,050	3500 7,550	2250 4,800	3200 7,100	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6050 13,000	5400 11,650	3300 7,150			4100 9,150	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
											
6.0 m 20.0 ft	kg lb				*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb				*3800 *8,300	*3800 *8,300	*3650 *7,400	2550 5,450	*2450 *5,350	2300 5,050	6.41 20'10"
3.0 m 10.0 ft	kg lb		*6400 *13,700	*6400 *13,700	*4650 *10,100	3850 8,250	3800 8,200	2500 5,300	*2450 *5,300	2000 4,350	6.93 22'8"
1.5 m 5.0 ft	kg lb		*7350 *18,000	6400 13,750	*5700 *12,250	3600 7,700	3700 7,950	2400 5,100	*2550 *5,600	1850 4,050	7.09 23'3"
0 m 0 ft	kg lb		*6500 *15,000	6100 13,050	5550 11,850	3400 7,300	3600 7,750	2300 4,900	*2850 *6,250	1900 4,150	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6050 13,000	5450 11,700	3300 7,150	3550 7,650	2250 4,850	3250 7,200	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6150 13,200	5500 11,800	3350 7,250			4150 9,300	5.43 17'8"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
												
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2600 5,500	*2450 *5,350	2300 5,100	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	3850 8,300	3850 8,250	2500 5,400	*2450 *5,300	2000 4,400	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	6450 13,900	*5700 *12,250	3600 7,750	3750 8,000	2400 5,150	*2550 *5,600	1900 4,100	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	6150 13,200	5600 12,000	3450 7,350	3650 7,800	2300 5,000	*2850 *6,250	1900 4,200	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6100 13,100	5500 11,800	3350 7,200	3600 7,750	2300 4,900	3300 7,250	2100 4,600	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6200 13,350	5550 11,950	3400 7,300			4200 9,400	2650 5,900	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
													
7.5 m 25.0 ft	kg lb										*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb						*2250 *2250	*2250 *2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb						*3350 *7,300	2500 5,350			*2050 *4,500	1950 4,350	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	3800 8,100	*3700 7,950	2450 5,200		*2050 *4,500	1700 3,750	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6350 13,700	*5300 *11,400	3500 7,550	3600 7,700	2300 4,950	*2400 1650	*2150 *4,750	1600 3,550	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	5900 12,700	5350 11,500	3300 7,050	3450 7,450	2200 4,700		*2400 *5,250	1650 3,550	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	5800 12,400	5250 11,200	3150 6,800	3400 7,300	2150 4,600		2800 6,150	1800 3,900	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	5850 12,500	5250 11,250	3200 6,800	3450	2150		3400 7,600	2150 4,800	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6050 13,000						*4000 *8,800	3350 7,650	4.48 14'4"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
														
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2600 5,550			*2050 *4,500	2050 4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	3900 8,350	*3700 *8,000	2500 5,350			*2050 *4,500	1800 3,900	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6600 14,150	*5300 *11,400	3600 7,800	3700 7,950	2400 5,100	*2400	1700	*2150 *4,750	1700 3,700	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6100 13,150	5550 11,900	3400 7,300	3600 7,700	2300 4,900			*2400 *5,250	1700 3,700	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6000 12,850	5450 11,650	3300 7,050	3550 7,600	2250 4,750			*2850 *6,250	1850 4,050	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6050 12,950	5450 11,650	3300 7,100	3550	2250			3550 7,850	2250 4,950	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6250 13,450							*4000 *8,800	3500 7,900	4.48 14'4"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
														
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2550 5,400			*2050 *4,500	2000 4,350	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	3800 8,200	*3700 *8,000	2450 5,250			*2050 *4,500	1750 3,800	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6400 13,800	*5300 *11,400	3550 7,600	3600 7,750	2350 5,000	*2400	1650	*2150 *4,750	1650 3,600	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	5950 12,800	5400 11,600	3300 7,100	3500 7,500	2200 4,750			*2400 *5,250	1650 3,600	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	5850 12,500	5300 11,300	3200 6,900	3450 7,400	2150 4,650			2800 6,200	1800 3,950	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	5900 12,650	5300 11,350	3200 6,900	3450	2200			3450 7,650	2200 4,800	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6100 13,150							*4000 *8,800	3400 7,700	4.48 14'4"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
														
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2550 5,450			*2050 *4,500	2000 4,400	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	3850 8,250	*3700 *8,000	2450 5,300			*2050 *4,500	1750 3,850	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6500 13,950	*5300 *11,400	3550 7,650	3650 7,850	2350 5,050	*2400	1650	*2150 *4,750	1650 3,600	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6000 12,900	5450 11,700	3350 7,200	3550 7,600	2250 4,800			*2400 *5,250	1650 3,650	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	5900 12,650	5350 11,450	3250 6,950	3450 7,450	2200 4,700			*2850 *6,250	1800 4,000	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	5950 12,750	5350 11,450	3250 6,950	3500	2200			3500 7,750	2200 4,900	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6150 13,250							*4000 *8,800	3450 7,800	4.48 14'4"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
														
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2600 5,550			*2050 *4,500	2050 4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	3900 8,350	*3700 *8,000	2500 5,350			*2050 *4,500	1800 3,900	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6550 14,100	*5300 *11,400	3600 7,750	3700 7,950	2400 5,100	*2400	1700	*2150 *4,750	1700 3,700	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6100 13,100	5550 11,900	3400 7,300	3600 7,700	2300 4,900			*2400 *5,250	1700 3,700	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6000 12,800	5400 11,600	3300 7,050	3550 7,550	2200 4,750			*2850 *6,250	1850 4,050	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6050 12,950	5400 11,600	3300 7,050	3550	2250			3550 7,850	2250 4,950	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6250 13,450							*4000 *8,800	3450 7,900	4.48 14'4"



ISO 10567:2007





* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				
														m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2600 5,600			*2050 *4,500	2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	3900 8,450	*3700 *8,000	2550 5,400			*2050 *4,500	1800 3,950	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6650 14,250	*5300 *11,400	3650 7,850	3750 8,050	2400 5,150	*2400	1700	*2150 *4,750	1700 3,700	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6150 13,250	5600 12,000	3450 7,350	3650 7,800	2300 4,950			*2400 *5,250	1700 3,750	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6050 12,950	5450 11,750	3300 7,150	3550 7,650	2250 4,800			*2850 *6,250	1850 4,100	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6100 13,100	5450 11,750	3300 7,150	3600	2250			3600 7,950	2250 5,000	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6300 *13,550							*4000 *8,800	3500 8,000	4.48 14'4"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	3900 8,350			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	3850 8,200	3700 *7,200	2350 5,050	*2550 *5,650	2200 4,850	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	6600 14,250	5750 12,300	3550 7,650	3600 7,700	2300 4,900	*2500 *5,550	1850 4,100	6.79 22'2"
1.5 m 5.0 ft	kg lb			5400 11,550	3250 7,000	3450 7,450	2150 4,650	*2600 *5,750	1750 3,800	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 11,900	5200 11,100	3100 6,600	3400 7,250	2100 4,450	2850 6,250	1750 3,850	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	5600 11,950	*5000 *10,750	3050 6,500	*3350 *6,950	2050 4,450	*2900 *6,400	2000 4,350	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4050 8,650			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	3950 8,450	*3800 *7,200	2450 5,200	*2550 *5,650	2250 5,000	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	6850 14,700	5950 12,750	3700 7,900	3750 8,000	2350 5,050	*2500 *5,550	1950 4,250	6.79 22'2"
1.5 m 5.0 ft	kg lb			5600 12,000	3400 7,300	3600 7,750	2250 4,850	*2600 *5,750	1800 3,950	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5350 11,550	3200 6,900	3500 7,500	2150 4,650	*2900 *6,350	1850 4,000	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	5800 12,400	*5000 *10,750	3150 6,800	*3350 *6,950	2150 4,650	*2900 *6,400	2050 4,500	6.25 20'5"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
										
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4000 8,600			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	3900 8,400	*3800 *7,200	2450 5,200	*2550 *5,650	2250 5,000	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	6800 14,650	5900 12,650	3650 7,850	3700 7,950	2350 5,050	*2500 *5,550	1900 4,200	6.79 22'2"
1.5 m 5.0 ft	kg lb			5550 11,900	3350 7,250	3600 7,700	2250 4,800	*2600 *5,750	1800 3,950	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5350 11,450	3200 6,850	3500 7,450	2150 4,600	*2900 *6,350	1800 4,000	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	5750 12,350	*5000 *10,750	3150 6,750	*3350 *6,950	2150 4,600	*2900 *6,400	2050 4,500	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				m ft/in
										
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4000 8,500			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	3900 8,350	3750 *7,200	2400 5,150	*2550 *5,650	2250 4,950	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	6750 14,500	5850 12,550	3650 7,800	3650 7,850	2350 5,000	*2500 *5,550	1900 4,150	6.79 22'2"
1.5 m 5.0 ft	kg lb			5500 11,800	3350 7,150	3550 7,600	2200 4,750	*2600 *5,750	1750 3,900	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 12,150	5300 11,350	3150 6,750	3450 7,400	2150 4,550	*2900 *6,350	1800 3,950	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	5700 12,200	*5000 *10,750	3100 6,650	*3350 *6,950	2100 4,550	*2900 *6,400	2000 4,450	6.25 20'5"



ISO 10567:2007






* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4050 8,600			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	3950 8,450	*3800 *7,200	2450 5,200	*2550 *5,650	2250 5,000	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	6800 14,700	5900 12,700	3650 7,900	3700 8,000	2350 5,050	*2500 *5,550	1950 4,250	6.79 22'2"
1.5 m 5.0 ft	kg lb			5550 11,950	3400 7,250	3600 7,700	2250 4,800	*2600 *5,750	1800 3,950	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5350 11,500	3200 6,850	3500 7,500	2150 4,650	*2900 *6,350	1850 4,000	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	5800 12,400	*5000 *10,750	3150 6,750	*3350 *6,950	2150 4,600	*2900 *6,400	2050 4,500	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4050 8,700			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	3950 8,550	*3800 *7,200	2450 5,250	*2550 *5,650	2300 5,050	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	6900 14,850	*5950 12,850	3700 8,000	3750 8,050	2400 5,100	*2500 *5,550	1950 4,300	6.79 22'2"
1.5 m 5.0 ft	kg lb			5650 12,100	3400 7,350	3650 7,800	2250 4,850	*2600 *5,750	1800 4,000	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5400 11,650	3250 6,950	3550 7,600	2200 4,700	*2900 *6,350	1850 4,050	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	5850 12,550	*5000 *10,750	3200 6,850	*3350 *6,950	2150 4,700	*2900 *6,400	2050 4,550	6.25 20'5"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




VA cylinder is flexible.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	4000 8,550			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	3900 8,400	3750 *8,000	2450 5,200	*2200 *4,850	2050 4,550	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	6850 14,750	5800 12,500	3650 7,850	3650 7,850	2350 5,000	*2200 *4,800	1750 3,900	7.08 23'2"
1.5 m 5.0 ft	kg lb			5450 11,750	3350 7,200	3500 7,550	2200 4,750	*2250 *4,950	1650 3,650	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	5600 12,050	5250 11,200	3150 6,700	3400 7,300	2100 4,500	*2500 *5,450	1700 3,700	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	5600 12,000	5150 11,050	3050 6,550	3350 7,250	2100 4,450	*2900 *6,400	1850 4,100	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 8,800			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4000 8,650	*3850 *8,000	2500 5,350	*2200 *4,850	2100 4,700	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7050 15,200	*5850 *12,550	3750 8,100	3800 8,100	2400 5,200	*2200 *4,800	1850 4,050	7.08 23'2"
1.5 m 5.0 ft	kg lb			5650 12,150	3450 7,450	3650 7,800	2300 4,900	*2250 *4,950	1750 3,800	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 12,500	5400 11,650	3250 7,000	3550 7,600	2200 4,700	*2500 *5,450	1750 3,850	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	5800 12,450	*5300 *11,450	3200 6,800	3500 7,500	2150 4,650	*2900 *6,400	1950 4,250	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




VA cylinder is flexible.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	4100 8,750			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4000 8,600	*3850 *8,000	2500 5,300	*2200 *4,850	2100 4,650	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7000 15,100	*5850 *12,550	3750 8,050	3750 8,050	2400 5,150	*2200 *4,800	1800 4,000	7.08 23'2"
1.5 m 5.0 ft	kg lb			5650 12,100	3450 7,400	3600 7,750	2300 4,900	*2250 *4,950	1700 3,750	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 12,400	5400 11,550	3250 6,950	3500 7,550	2200 4,650	*2500 *5,450	1750 3,800	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	5750 12,350	*5300 11,400	3150 6,750	3450 7,450	2150 4,600	*2900 *6,400	1900 4,200	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	4050 8,700			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	3950 8,500	3800 *8,000	2450 5,250	*2200 *4,850	2100 4,600	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	6950 15,000	*5850 *12,550	3700 7,950	3700 8,000	2400 5,100	*2200 *4,800	1800 3,950	7.08 23'2"
1.5 m 5.0 ft	kg lb			5550 11,950	3400 7,300	3600 7,700	2250 4,850	*2250 *4,950	1700 3,700	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 12,300	5350 11,450	3200 6,850	3450 7,450	2150 4,600	*2500 *5,450	1700 3,750	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	5700 12,250	5250 11,250	3100 6,700	3450 7,400	2100 4,550	*2900 *6,400	1900 4,150	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




VA cylinder is flexible.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 8,800			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4000 8,600	*3850 *8,000	2500 5,350	*2200 *4,850	2100 4,700	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7050 15,150	*5850 *12,550	3750 8,050	3750 8,100	2400 5,150	*2200 *4,800	1850 4,000	7.08 23'2"
1.5 m 5.0 ft	kg lb			5650 12,150	3450 7,400	3650 7,800	2300 4,900	*2250 *4,950	1700 3,750	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 12,450	5400 11,600	3250 6,950	3500 7,550	2200 4,700	*2500 *5,450	1750 3,800	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	5800 12,400	*5300 11,450	3150 6,800	3500 7,500	2150 4,600	*2900 *6,400	1950 4,250	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4050 8,700	*3850 *8,000	2550 5,400	*2200 *4,850	2150 4,750	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7100 15,300	*5850 *12,550	3800 8,150	3800 8,200	2450 5,200	*2200 *4,800	1850 4,050	7.08 23'2"
1.5 m 5.0 ft	kg lb			5700 12,250	3500 7,500	3700 7,900	2300 4,950	*2250 *4,950	1750 3,800	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 12,600	5450 11,750	3300 7,050	3550 7,650	2200 4,750	*2500 *5,450	1750 3,850	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	5850 12,550	*5300 *11,450	3200 6,900	3550 7,600	2200 4,700	*2900 *6,400	1950 4,300	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
6.0 m 20.0 ft	kg lb					*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb					*4100 *8,850	4050 8,650	*3300	2550	*2800 *6,200	2450 5,450	6.10 20'0"
3.0 m 10.0 ft	kg lb			*6950 *14,900	*6950 *14,900	*4900 *10,550	3800 8,200	3650 7,800	2500 5,300	*2800 *6,150	2100 4,650	6.64 21'9"
1.5 m 5.0 ft	kg lb					5450 11,750	3550 7,700	3550 7,550	2400 5,100	2900 6,400	2000 4,350	6.81 22'4"
0 m 0 ft	kg lb			*6050 *14,050	6050 13,150	5300 11,350	3400 7,300	3450 7,400	2300 4,950	3000 6,550	2000 4,400	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	6150 13,150	5250 11,200	3350 7,200	3450	2300	3350 7,400	2250 4,950	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6250 13,450	5250 11,200	3450 7,400			*4400 *9,650	2950 6,550	5.06 16'7"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
6.0 m 20.0 ft	kg lb					*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb					*4100 *8,850	*4100 *8,850	*3300	2750	*2800 *6,200	*2650 *5,900	6.10 20'0"
3.0 m 10.0 ft	kg lb			*6950 *14,900	*6950 *14,900	*4900 *10,550	4150 8,900	*4150 *9,000	2700 5,750	*2800 *6,150	2300 5,000	6.64 21'9"
1.5 m 5.0 ft	kg lb					*5850 *12,600	3900 8,350	*4500 *9,750	2600 5,550	*2950 *6,500	2150 4,700	6.81 22'4"
0 m 0 ft	kg lb			*6050 *14,050	*6050 *14,050	*6400 *13,800	3700 8,000	*4750 *10,250	2500 5,350	*3300 *7,300	2200 4,800	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	6800 14,550	*6300 *13,600	3650 7,850	*4500	2500	*4100 *9,000	2450 5,400	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6900 14,850	*5250 *11,200	3750 8,050			*4400 *9,650	3200 7,150	5.06 16'7"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up



2500 mm (8'2") Blade




	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb				*4100 *8,850	4050 8,650	*3300 2550		*2800 *6,200	2450 5,450	6.10 20'0"
3.0 m 10.0 ft	kg lb		*6950 *14,900	*6950 *14,900	*4900 *10,550	3800 8,200	3650 7,800	2500 5,300	*2800 *6,150	2100 4,650	6.64 21'9"
1.5 m 5.0 ft	kg lb				5450 11,750	3550 7,700	3550 7,550	2400 5,100	2900 6,400	2000 4,350	6.81 22'4"
0 m 0 ft	kg lb		*6050 *14,050	6050 13,150	5300 11,350	3400 7,300	3450 7,400	2300 4,950	3000 6,550	2000 4,400	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	6150 13,150	5250 11,200	3350 7,200	3450	3350 7,400	2250 4,950	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6250 13,450	5250 11,200	3450 7,400		*4400 *9,650	2950 6,550	5.06 16'7"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb				*4100 *8,850	*4100 *8,850	*3300 2750		*2800 *6,200	*2650 *5,900	6.10 20'0"
3.0 m 10.0 ft	kg lb		*6950 *14,900	*6950 *14,900	*4900 *10,550	4150 8,900	*4150 *9,000	2700 5,750	*2800 *6,150	2300 5,000	6.64 21'9"
1.5 m 5.0 ft	kg lb				*5850 *12,600	3900 8,350	*4500 *9,750	2600 5,550	*2950 *6,500	2150 4,700	6.81 22'4"
0 m 0 ft	kg lb		*6050 *14,050	*6050 *14,050	*6400 *1,300	3700 8,000	*4750 *10,250	2500 5,350	*3300 *7,300	2200 4,800	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	6800 14,550	*6300 *13,600	3650 7,850	*4500	*4100 *9,000	2450 5,400	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6900 14,850	*5250 *11,200	3750 8,050		*4400 *9,650	3200 7,150	5.06 16'7"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2600 mm (8'6") Blade




	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3900 *8,650	*3550 *7,900			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb				*4100 *8,850	*3800 *8,300	*3300	2600	*2800 *6,200	2500 5,600	6.10 20'0"
3.0 m 10.0 ft	kg lb		*6950 *14,900	*6950 *14,900	*4900 *10,550	3950 8,500	3700 7,950	2550 5,450	*2800 *6,150	2150 4,750	6.64 21'9"
1.5 m 5.0 ft	kg lb				5550 11,950	3700 7,950	3600 7,700	2450 5,250	*2950 *6,500	2050 4,450	6.81 22'4"
0 m 0 ft	kg lb		*6050 *14,050	6050 13,450	5400 11,550	3550 7,600	3500 7,550	2350 5,050	*3050 *6,650	2050 4,500	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	6250 13,450	5300 11,400	3450 7,450	3500	3400 7,550	2300 5,050	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6400 13,750	*5250 *11,200	3500 7,500		*4400 *9,650	3000 6,700	5.06 16'7"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2600 mm (8'6") Blade



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb				*4100 *8,850	*4100 *8,850	*3300	2850	*2800 *6,200	*2750 *6,250	6.10 20'0"
3.0 m 10.0 ft	kg lb		*6950 *14,900	*6950 *14,900	*4900 *10,550	4300 9,250	*4150 *9,000	2800 6,000	*2800 *6,150	2400 5,250	6.64 21'9"
1.5 m 5.0 ft	kg lb				*5850 *12,600	4050 8,700	*4500 *9,750	2700 5,800	*2950 *6,500	2250 4,900	6.81 22'4"
0 m 0 ft	kg lb		*6050 *14,050	*6050 *14,050	*6400 *13,800	3900 8,350	*4750 *10,250	2600 5,600	*3300 *7,300	2300 5,000	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	7150 15,300	*6300 *13,600	3850 8,250	*4500	*4100 *9,000	2550 5,600	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	7250 15,600	*5250 *11,200	3900 8,400		*4400 *9,650	3350 7,450	5.06 16'7"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up



2700 mm (8'10") Blade




		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
												
6.0 m 20.0 ft	kg lb					*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb					*4100 *8,850	*4100 *8,850	*3300	2650	*2800 *6,200	2550 5,650	6.10 20'0"
3.0 m 10.0 ft	kg lb			*6950 *14,900	*6400 *13,700	*4900 *10,550	3950 8,450	3750 8,050	2550 5,500	*2800 *6,150	2200 4,800	6.64 21'9"
1.5 m 5.0 ft	kg lb					5650 12,100	3700 7,950	3650 7,800	2450 5,300	*2950 *6,500	2050 4,500	6.81 22'4"
0 m 0 ft	kg lb			*6050 *14,050	*6400 13,750	5450 11,700	3550 7,600	3550 7,650	2400 5,150	3100 6,750	2100 4,600	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	6400 13,700	5400 11,600	3500 7,500	3550	2400	3450 7,650	2350 5,150	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6450 13,900	*5250 *11,200	3550 7,650			*4400 *9,650	3050 6,800	5.06 16'7"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
												
6.0 m 20.0 ft	kg lb					*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb					*4100 *8,850	*4100 *8,850	*3300	2950	*2800 *6,200	*2800 *6,200	6.10 20'0"
3.0 m 10.0 ft	kg lb			*6950 *14,900	*6950 *14,900	*4900 *10,550	4450 9,550	*4150 *9,000	2950 6,300	*2800 *6,150	2450 5,400	6.64 21'9"
1.5 m 5.0 ft	kg lb					*5850 *12,600	4200 9,000	*4500 *9,750	2800 6,000	*2950 *6,500	2300 5,100	6.81 22'4"
0 m 0 ft	kg lb			*6050 *14,050	*6050 *14,050	*6400 *13,800	4050 8,650	*4750 *10,250	2700 5,800	*3300 *7,300	2350 5,200	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	7450 15,950	*6300 *13,600	4000 8,550	*4500	2700	*4100 *9,000	2650 5,800	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	7550 16,200	*5250 *11,200	4050 8,700			*4400 *9,650	3450 7,700	5.06 16'7"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2700 mm (8'10") Blade




	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb				*4100 *8,850	*4100 *8,850	*3300	2650	*2800 *6,200	2600 *5,700	6.10 20'0"
3.0 m 10.0 ft	kg lb		*6950 *14,900	*6950 *14,900	*4900 *10,550	4000 8,550	3800 8,150	2600 5,550	*2800 *6,150	2200 4,850	6.64 21'9"
1.5 m 5.0 ft	kg lb				5700 12,250	3750 8,050	3700 7,900	2500 5,350	*2950 *6,500	2100 4,550	6.81 22'4"
0 m 0 ft	kg lb		*6050 *14,050	*6050 13,750	5500 11,850	3550 7,650	3600 7,750	2400 5,200	*3100 *6,850	2100 4,650	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	6400 13,750	5450 11,700	3500 7,550	3600	3500 7,750	2350 5,200	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	6550 14,050	5250 11,200	3600 7,750		*4400 *9,650	3100 6,850	5.06 16'7"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3900 *8,650	*3900 *8,650			*3050 *6,750	*3050 *6,750	5.06 16'7"
4.5 m 15.0 ft	kg lb				*4100 *8,850	*4100 *8,850	*3300	3000	*2800 *6,200	*2800 *6,200	6.10 20'0"
3.0 m 10.0 ft	kg lb		*6950 *14,900	*6950 *14,900	*4900 *10,550	4500 9,650	*4150 *9,000	2900 6,250	*2800 *6,150	2500 5,500	6.64 21'9"
1.5 m 5.0 ft	kg lb				*5850 *12,600	4250 9,100	*4500 *9,750	2800 6,050	*2950 *6,500	2350 5,150	6.81 22'4"
0 m 0 ft	kg lb		*6050 *14,050	*6500 *14,050	*6400 *13,800	4050 8,750	*4750 *10,250	2750 5,900	*3300 *7,300	2400 5,250	6.64 21'9"
-1.5 m -5.0 ft	kg lb	*5100 *11,450	*5100 *11,450	*9300 *20,150	7500 16,050	*6300 *13,600	4000 8,650	*4500	*4100 *9,000	2700 5,900	6.09 19'11"
-3.0 m -10.0 ft	kg lb			*7700 *16,600	7650 16,400	*5250 *11,200	4100 8,800		*4400 *9,650	3500 7,800	5.06 16'7"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up



2500 mm (8'2") Blade




	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb				*3800 *8,300	*3800 *8,300	*3650 *7,400	2600 5,550	*2450 *5,350	2300 5,150	6.41 20'10"
3.0 m 10.0 ft	kg lb		*6400 *13,700	*6400 *13,700	*4650 *10,100	3900 8,350	3700 7,900	2500 5,400	*2450 *5,300	2000 4,400	6.93 22'8"
1.5 m 5.0 ft	kg lb		*7350 *18,000	6500 14,000	5550 11,900	3650 7,800	3550 7,650	2400 5,200	*2550 *5,600	1900 4,150	7.09 23'3"
0 m 0 ft	kg lb		*6500 *15,000	6200 13,300	5350 11,450	3450 7,400	3450 7,450	2350 5,000	2850 6,200	1900 4,200	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6150 13,200	5250 11,250	3400 7,250	3450 7,400	2300 4,950	3150 6,900	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6250 13,400	5300 11,350	3400 7,350			4000 8,950	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb				*3800 *8,300	*3800 *8,300	*3650 *7,400	2800 5,950	*2450 *5,350	*2450 *5,350	6.41 20'10"
3.0 m 10.0 ft	kg lb		*6400 *13,700	*6400 *13,700	*4650 *10,100	4200 9,050	*4000 *8,700	2700 5,850	*2450 *5,300	2150 4,750	6.93 22'8"
1.5 m 5.0 ft	kg lb		*7350 *18,000	7150 15,400	*5700 *12,250	3950 8,500	*4400 *9,550	2600 5,600	*2550 *5,600	2050 4,500	7.09 23'3"
0 m 0 ft	kg lb		*6500 *15,000	*6500 *14,700	*6350 *13,700	3750 8,100	*4700 *10,200	2550 5,450	*2850 *6,250	2100 4,550	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6800 14,600	*6400 *13,850	3700 7,900	*4650 *9,950	2500 5,350	*3450 *7,600	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6900 14,850	*5600 *12,050	3750 8,000			*4300 *9,450	5.43 17'8"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2700 5,700	*2450 *5,350	2400 5,300	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	4000 8,600	3800 8,150	2600 5,600	*2450 *5,300	2100 4,550	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	6700 14,450	*5700 *12,250	3750 8,050	3700 7,950	2500 5,350	*2550 *5,600	1950 4,300	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	6400 13,750	5550 11,850	3550 7,650	3600 7,750	2400 5,200	*2850 *6,250	2000 4,350	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6350 13,650	5450 11,700	3500 7,500	3550 7,650	2400 5,100	3250 7,200	2200 4,800	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6450 13,850	5500 11,800	3550 7,600			4150 9,250	2750 6,150	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2900 6,150	*2450 *5,350	*2450 *5,350	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	4350 9,300	*4000 *8,700	2800 6,050	*2450 *5,300	2250 4,950	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	*7350 *15,900	*5700 *12,250	4050 8,750	*4400 *9,550	2700 5,800	*2550 *5,600	2100 4,650	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	*6500 *15,000	*6350 *13,700	3900 8,350	*4700 *10,200	2600 5,600	*2850 *6,250	2150 4,700	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	7050 15,100	*6400 *13,850	3800 8,200	*4650 *9,950	2600 5,550	*3450 *7,600	2400 5,250	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	7150 15,350	*5600 *12,050	3850 8,300			*4300 *9,450	3000 6,650	5.43 17'8"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up



2500 mm (8'2") Blade




		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
												
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2600 5,600	*2450 *5,350	2350 5,150	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	3900 8,400	3700 7,950	2550 5,450	*2450 *5,300	2050 4,450	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	6550 14,100	5600 12,000	3650 7,850	3600 7,700	2450 5,250	*2550 *5,600	1900 4,200	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	6250 13,400	5400 11,550	3500 7,500	3500 7,500	2350 5,050	*2850 *6,250	1950 4,250	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6200 13,300	5300 11,350	3400 7,350	3450 7,450	2300 5,000	3150 7,000	2150 4,700	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6300 13,550	5350 11,500	3450 7,400			4050 9,000	2700 6,000	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
												
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2800 6,000	*2450 *5,350	*2450 *5,350	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	4250 9,100	*4000 *8,700	2750 5,900	*2450 *5,300	2200 4,800	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	7250 15,550	*5700 *12,250	4000 8,550	*4400 *9,550	2650 5,650	*2550 *5,600	2050 4,550	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	*6500 *14,800	*6350 *13,700	3800 8,150	*4700 *10,200	2550 5,500	*2850 *6,250	2100 4,600	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6850 14,750	*6400 *13,850	3700 8,000	*4650 *9,950	2500 5,400	*3450 *7,600	2300 5,100	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6950 14,950	*5600 *12,050	3750 8,100			*4300 *9,450	2950 6,500	5.43 17'8"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2600 mm (8'6") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
												
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2650 5,650	*2450 *5,350	2350 5,250	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	3950 8,500	3750 8,050	2600 5,500	*2450 *5,300	2050 4,500	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	6650 14,250	5650 12,100	3700 7,950	3650 7,800	2450 5,300	*2550 *5,600	1950 4,250	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	6350 13,600	5450 11,650	3550 7,600	3550 7,600	2400 5,100	*2850 *6,250	1950 4,300	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6300 13,500	5350 11,450	3450 7,450	3500 7,500	2350 5,050	3200 7,050	2150 4,750	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6400 13,700	5400 11,600	3500 7,500			4100 9,100	2750 6,050	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2600 mm (8'6") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
												
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2900 6,200	*2450 *5,350	*2450 *5,350	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	4350 9,400	*4000 *8,700	2850 6,100	*2450 *5,300	2250 5,000	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	*7350 *16,150	*5700 *12,250	4100 8,850	*4400 *9,550	2750 5,850	*2550 *5,600	2150 4,700	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	*6500 *15,000	*6350 *13,700	3950 8,450	*4700 *10,200	2650 5,650	*2850 *6,250	2150 4,750	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	7150 15,350	*6400 *13,850	3850 8,300	*4650 *9,950	2600 5,600	*3450 *7,600	2400 5,250	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	7250 15,550	*5600 *12,050	3900 8,400			*4300 *9,450	3050 6,750	5.43 17'8"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up



2700 mm (8'10") Blade




	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb				*3800 *8,300	*3800 *8,300	*3650 *7,400	2700 5,750	*2450 *5,350	2400 5,300	6.41 20'10"
3.0 m 10.0 ft	kg lb		*6400 *13,700	*6400 *13,700	*4650 *10,100	4000 8,600	3800 8,150	2600 5,600	*2450 *5,300	2100 4,600	6.93 22'8"
1.5 m 5.0 ft	kg lb		*7350 *18,000	6700 14,450	*5700 *12,250	3750 8,100	3700 7,900	2500 5,400	*2550 *5,600	1950 4,300	7.09 23'3"
0 m 0 ft	kg lb		*6500 *15,000	6400 13,750	5500 11,800	3600 7,700	3600 7,700	2400 5,200	*2850 *6,250	2000 4,350	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6400 13,700	5400 11,650	3500 7,550	3550 7,600	2400 5,150	3250 7,150	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6450 13,900	5450 11,750	3550 7,650		4150 9,250	2800 6,150	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
											
6.0 m 20.0 ft	kg lb				*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb				*3800 *8,300	*3800 *8,300	*3650 *7,400	3000 6,400	*2450 *5,350	*2450 *5,350	6.41 20'10"
3.0 m 10.0 ft	kg lb		*6400 *13,700	*6400 *13,700	*4650 *10,100	4500 9,700	*4000 *8,700	2950 6,300	*2450 *5,300	2350 5,150	6.93 22'8"
1.5 m 5.0 ft	kg lb		*7350 *18,000	*7350 *16,800	*5700 *12,250	4250 9,150	*4400 *9,550	2850 6,050	*2550 *5,600	2200 4,850	7.09 23'3"
0 m 0 ft	kg lb		*6500 *15,000	*6500 *15,000	*6350 *13,700	4050 8,750	*4700 *10,200	2750 5,900	*2850 *6,250	2250 4,950	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	7450 15,950	*6400 *13,850	4000 8,600	*4650 *9,950	2700 5,800	*3450 *7,600	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	7550 16,200	*5600 *12,050	4050 8,700		*4300 *9,450	3150 7,000	5.43 17'8"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2700 mm (8'10") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
												
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	2700 5,800	*2450 *5,350	2400 *5,350	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	4050 8,700	3850 8,250	2650 5,650	*2450 *5,300	2100 4,600	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	6800 14,600	*5700 *12,250	3800 8,150	3700 8,000	2550 5,450	*2550 *5,600	2000 4,350	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	*6500 13,900	5550 11,950	3600 7,750	3650 7,800	2450 5,250	*2850 *6,250	2000 4,400	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	6450 13,800	5500 11,750	3550 7,600	3600 7,700	2400 5,200	3300 7,250	2200 4,900	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	6550 14,050	5550 11,850	3600 7,700			4200 9,350	2800 6,200	5.43 17'8"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
												
6.0 m 20.0 ft	kg lb					*3550 *7,900	*3550 *7,900			*2600 *5,800	*2600 *5,800	5.44 17'6"
4.5 m 15.0 ft	kg lb					*3800 *8,300	*3800 *8,300	*3650 *7,400	3050 6,500	*2450 *5,350	*2450 *5,350	6.41 20'10"
3.0 m 10.0 ft	kg lb			*6400 *13,700	*6400 *13,700	*4650 *10,100	4550 9,800	*4000 *8,700	2950 6,350	*2450 *5,300	2350 5,200	6.93 22'8"
1.5 m 5.0 ft	kg lb			*7350 *18,000	*7350 16,950	*5700 *12,250	4300 9,250	*4400 *9,550	2850 6,150	*2550 *5,600	2250 4,900	7.09 23'3"
0 m 0 ft	kg lb			*6500 *15,000	*6500 *15,000	*6350 *13,700	4100 8,850	*4700 *10,200	2750 5,950	*2850 *6,250	2250 5,000	6.93 22'8"
-1.5 m -5.0 ft	kg lb	*4800 *10,700	*4800 *10,700	*9600 *20,750	7550 16,150	*6400 *13,850	4050 8,700	*4650 *9,950	2750 5,850	*3450 *7,600	2500 5,500	6.41 20'11"
-3.0 m -10.0 ft	kg lb	*8850 *20,000	*8850 *20,000	*8250 *17,750	7650 16,350	*5600 *12,050	4100 8,800			*4300 *9,450	3200 7,050	5.43 17'8"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2650 5,600			*2050 *4,500	2050 4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	3950 8,500	*3700 *7,950	2550 5,450			*2050 *4,500	1800 3,950	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6650 14,350	*5300 *11,400	3650 7,900	3550 7,650	2400 5,200	*2400	1750	*2150 *4,750	1700 3,750	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6200 13,300	5350 11,450	3450 7,400	3450 7,400	2300 4,950			*2400 *5,250	1700 3,750	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6100 13,050	5200 11,200	3350 7,200	3400 7,300	2250 4,850			2800 6,100	1900 4,100	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6150 13,150	5200 11,200	3350 7,200	3400	2300			3400 7,550	2300 5,050	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6350 *13,550							*4000 *8,800	3550 8,050	4.48 14'4"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2850 6,050			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	*4200 *9,050	*3700 *8,000	2750 5,900			*2050 *4,500	1950 4,300	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	7350 15,800	*5300 *11,400	4000 8,550	*4150 *9,050	2600 5,600	*2400	1850	*2150 *4,750	1850 4,050	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6850 14,750	*6100 *13,250	3750 8,050	*4550 *9,900	2500 5,400			*2400 *5,250	1850 4,100	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6750 14,450	*6400 *13,850	3650 7,850	*4700 *10,100	2450 5,250			*2850 *6,250	2050 4,450	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6800 14,550	*5950 *12,800	3650 7,850	*3950	2500			*3800 *8,450	2450 5,450	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550							*4000 *8,800	3850 8,750	4.48 14'4"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade




		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
														
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2700 5,800			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	4050 8,750	*3700 *8,000	2650 5,650			*2050 *4,500	1900 4,100	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6900 14,800	*5300 *11,400	3800 8,150	3700 7,950	2500 5,350	*2400	1800	*2150 *4,750	1750 3,900	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6400 13,750	5550 11,850	3550 7,750	3600 7,700	2400 5,150			*2400 *5,250	1800 3,900	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6300 13,500	5400 11,600	3450 7,450	3500 7,550	2350 5,000			*2850 *6,250	1950 4,250	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6350 13,600	5400 11,600	3450 7,450	3550	2350			3550 7,850	2350 5,200	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550							*4000 *8,800	3650 8,300	4.48 14'4"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
														
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2900 6,250			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	*4200 *9,050	*3700 *8,000	2850 6,050			*2050 *4,500	2050 4,450	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	7600 16,300	*5300 *11,400	4100 8,850	*4150 *9,050	2700 5,800	*2400	1950	*2150 *4,750	1900 4,200	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	7100 15,250	*6100 *13,250	3900 8,350	*4550 *9,900	2600 5,600			*2400 *5,250	1950 4,250	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6950 14,950	*6400 *13,850	3800 8,100	*4700 *10,100	2550 5,450			*2850 *6,250	2100 4,650	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	7050 15,050	*5950 *12,800	3800 8,100	*3950	2550			*3800 *8,450	2550 5,650	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550							*4000 *8,800	3950 8,300	4.48 14'4"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2650 5,650			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	4000 8,550	*3700 *8,000	2550 5,500			*2050 *4,500	1850 4,000	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6700 14,450	*5300 *11,400	3700 7,950	3600 7,750	2450 5,250	*2400	1750	*2150 *4,750	1750 3,800	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6250 13,450	5400 11,550	3500 7,500	3500 7,500	2350 5,000			*2400 *5,250	1750 3,800	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6150 13,150	5250 11,300	3350 7,250	3450 7,350	2300 4,900			2800 6,200	1900 4,150	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6200 13,250	5250 11,300	3350 7,250	3450	2300			3450 7,650	2300 5,100	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6400 *13,550							*4000 *8,800	3550 8,100	4.48 14'4"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2850 6,100			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	*4200 *9,050	*3700 *8,000	2750 5,950			*2050 *4,500	2000 4,350	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	7400 15,900	*5300 *11,400	4000 8,650	*4150 *9,050	2650 5,650	*2400	1900	*2150 *4,750	1850 4,100	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6950 14,850	*6100 *13,250	3800 8,150	*4550 *9,900	2550 5,450			*2400 *5,250	1900 4,150	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6800 14,550	*6400 *13,850	3700 7,900	*4700 *10,100	2500 5,300			*2850 *6,250	2050 4,500	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6850 14,700	*5950 *12,800	3700 7,900	*3950	2500			*3800 *8,450	2500 5,500	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	6400 *13,550							*4000 *8,800	3900 *8,800	4.48 14'4"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2600 mm (8'6") Blade



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb										*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb						*2250 *2250				*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb						*3350 *7,300	2700 5,750			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	4000 8,650	*3700 *8,000	2600 5,550		*2050 *4,500	1850 4,050	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6800 14,650	*5300 *11,400	3750 8,050	3650 7,800	2500 5,300	*2400 1750	*2150 *4,750	1750 3,850	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6350 13,600	5450 11,650	3550 7,550	3500 7,550	2350 5,100		*2400 *5,250	1750 3,850	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6200 13,350	5300 11,400	3400 7,350	3450 7,400	2300 4,950		*2850 *6,250	1900 4,200	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6250 13,450	5300 11,400	3400 7,350	3500	2350		3450 7,700	2350 5,150	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550						*4000 *8,800	3600 8,200	4.48 14'4"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2600 mm (8'6") Blade



	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb										*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb						*2250 *2250				*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb						*3350 *7,300	2950 6,300			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	*4200 *9,050	*3700 *8,000	2850 6,100		*2050 *4,500	2050 4,500	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	7700 16,550	*5300 *11,400	4150 8,950	*4150 *9,050	2750 5,850	*2400 1950	*2150 *4,750	1950 4,250	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	7200 15,450	*6100 *13,250	3950 8,450	*4550 *9,900	2650 5,650		*2400 *5,250	1950 4,300	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	7100 15,150	*6400 *13,850	3800 8,200	*4700 *10,100	2550 5,500		*2850 *6,250	2150 4,650	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	7150 15,300	*5950 *12,800	3800 8,200	*3950	2600		*3800 *8,450	2600 5,700	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550						*4000 *8,800	4000 8,800	4.48 14'4"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up



2700 mm (8'10") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2700 5,800			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	4050 8,750	*3700 *8,000	2650 5,650			*2050 *4,500	1900 4,150	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6900 14,800	*5300 *11,400	3800 8,150	3700 7,900	2500 5,400	*2400	1800	*2150 *4,750	1800 3,900	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6450 13,800	5500 11,800	3550 7,700	3550 7,650	2400 5,150			*2400 *5,250	1800 3,900	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6300 13,500	5400 11,550	3450 7,450	3500 7,550	2350 5,050			*2850 *6,250	1950 4,300	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6350 13,650	5400 11,550	3450 7,450	3550	2350			3500 7,800	2350 5,250	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550							*4000 *8,800	3650 8,300	4.48 14'4"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	3050 6,500			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	*4200 *9,050	*3700 *8,000	2950 6,350			*2050 *4,500	*2050 *4,500	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	8000 17,200	*5300 *11,400	4300 9,250	*4150 *9,050	2850 6,050	*2400	2050	*2150 *4,750	2000 4,400	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	*7250 *16,100	*6100 *13,250	4050 8,750	*4550 *9,900	2700 5,850			*2400 *5,250	2050 4,450	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	7400 15,800	*6400 *13,850	3950 8,500	*4700 *10,100	2650 5,700			*2850 *6,250	2200 4,850	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	7450 15,950	*5950 *12,800	3950 8,500	*3950	2700			*3800 *8,450	2700 5,950	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550							*4000 *8,800	*4000 *8,800	4.48 14'4"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2700 mm (8'10") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	2750 5,850			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	4100 8,850	*3700 *8,000	2650 5,700			*2050 *4,500	1900 4,150	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	6950 14,950	*5300 *11,400	3850 8,250	3750 8,000	2550 5,450	*2400	1800	*2150 *4,750	1800 3,950	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	6500 13,950	5550 11,950	3600 7,750	3600 7,750	2450 5,200			*2400 *5,250	1800 3,950	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	6350 13,650	5450 11,700	3500 7,550	3550 7,600	2350 5,100			*2850 *6,250	1950 4,300	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	6400 13,750	5450 11,700	3500 7,550	3600	2400			3550 7,900	2400 5,300	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550							*4000 *8,800	3700 8,400	4.48 14'4"

Reach Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				m ft/in
7.5 m 25.0 ft	kg lb											*2600 *5,850	*2600 *5,850	4.49 14'1"
6.0 m 20.0 ft	kg lb							*2250	*2250			*2200 *4,850	*2200 *4,850	6.03 19'6"
4.5 m 15.0 ft	kg lb							*3350 *7,300	3050 6,550			*2050 *4,500	*2050 *4,500	6.92 22'6"
3.0 m 10.0 ft	kg lb			*5350 *11,450	*5350 *11,450	*4200 *9,050	*4200 *9,050	*3700 *8,000	3000 6,400			*2050 *4,500	*2050 *4,500	7.40 24'2"
1.5 m 5.0 ft	kg lb			*8200 *17,650	8050 17,350	*5300 *11,400	4350 9,350	*4150 *9,050	2850 6,150	*2400	2050	*2150 *4,750	2050 4,450	7.55 24'9"
0 m 0 ft	kg lb			*7250 *16,750	*7250 *16,250	*6100 *13,250	4100 8,850	*4550 *9,900	2750 5,900			*2400 *5,250	2050 4,500	7.40 24'3"
-1.5 m -5.0 ft	kg lb	*4350 *9,700	*4350 *9,700	*9200 *21,000	7450 15,950	*6400 *13,850	4000 8,600	*4700 *10,100	2700 5,800			*2850 *6,250	2250 4,900	6.91 22'7"
-3.0 m -10.0 ft	kg lb	*7450 *16,800	*7450 *16,800	*8800 *19,050	7500 16,100	*5950 *12,800	4000 8,600	*3950	2700			*3800 *8,450	2700 6,000	6.02 19'7"
-4.5 m -15.0 ft	kg lb			*6400 *13,550	*6400 *13,550							*4000 *8,800	*4000 *8,800	4.48 14'4"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4100 8,750			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4000 8,550	3650 *7,200	2500 5,300	*2550 *5,650	2300 5,100	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	6900 14,900	5700 12,250	3750 8,000	3600 7,700	2400 5,150	*2500 *5,550	1950 4,300	6.79 22'2"
1.5 m 5.0 ft	kg lb			5350 11,550	3450 7,400	3450 7,400	2300 4,900	*2600 *5,750	1850 4,000	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5150 11,050	3250 7,000	3350 7,200	2200 4,700	2850 6,200	1850 4,100	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	5900 12,600	*5000 *10,750	3200 6,900	*3350 *6,950	2200 4,700	*2900 *6,400	2100 4,600	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4400 9,450			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4300 9,300	*3800 *7,200	2700 5,700	*2550 *5,650	2500 5,500	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7600 16,400	*5950 *12,900	4050 8,700	*4400 *9,500	2600 5,600	*2500 *5,550	2150 4,700	6.79 22'2"
1.5 m 5.0 ft	kg lb			*6300 *13,700	3750 8,050	*4650 *10,050	2500 5,350	*2600 *5,750	2000 4,400	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	*6050 *13,100	3550 7,650	*4350 *9,350	2400 5,150	*2900 *6,350	2050 4,450	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	*6450 *14,000	*5000 *10,750	3500 7,550	*3350 *6,950	2400 5,150	*2900 *6,400	2300 5,000	6.25 20'5"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
										
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4200 9,000			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4100 8,850	*3800 *7,200	2550 5,450	*2550 *5,650	2350 5,250	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7100 15,350	5900 12,700	3850 8,300	3700 7,950	2500 5,350	*2500 *5,550	2050 4,450	6.79 22'2"
1.5 m 5.0 ft	kg lb			5550 11,950	3550 7,650	3600 7,700	2350 5,100	*2600 *5,750	1900 4,150	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5350 11,500	3350 7,250	3500 7,500	2300 4,900	*2900 *6,350	1950 4,250	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	6100 13,050	*5000 *10,750	3300 7,150	*3350 *6,950	2250 4,900	*2900 *6,400	2150 4,750	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
										
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	*4550 *9,700			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4450 9,550	*3800 *7,200	2750 5,900	*2550 *5,650	*2550 *5,650	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7850 16,900	*5950 *12,900	4200 9,000	*4400 *9,500	2700 5,800	*2500 *5,550	2200 4,850	6.79 22'2"
1.5 m 5.0 ft	kg lb			*6300 *13,700	3900 8,350	*4650 *10,050	2600 5,550	*2600 *5,750	2050 4,550	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	*6050 *13,100	3700 7,950	*4350 *9,350	2500 5,350	*2900 *6,350	2100 4,650	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	*6450 *14,000	*5000 *10,750	3650 7,850	*3350 *6,950	2500 5,350	*2900 *6,400	2350 5,200	6.25 20'5"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4200 8,950			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4100 8,800	3800 *7,200	2550 5,450	*2550 *5,650	2350 5,200	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7100 15,250	5850 12,600	3850 8,250	3700 7,900	2450 5,300	*2500 *5,550	2000 4,450	6.79 22'2"
1.5 m 5.0 ft	kg lb			5550 11,900	3550 7,600	3550 7,650	2350 5,050	*2600 *5,750	1900 4,150	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5300 11,400	3350 7,200	3450 7,450	2250 4,850	*2900 *6,350	1900 4,200	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	6050 12,950	*5000 *10,750	3300 7,100	*3350 *6,950	2250 4,850	*2900 *6,400	2150 4,750	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4500 9,650			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4450 9,500	*3800 *7,200	2750 5,900	*2550 *5,650	2550 *5,650	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7800 16,800	*5950 *12,900	4150 8,950	*4400 *9,500	2700 5,750	*2500 *5,550	2200 4,800	6.79 22'2"
1.5 m 5.0 ft	kg lb			*6300 *13,700	3850 8,300	*4650 *10,050	2550 5,500	*2600 *5,750	2050 4,500	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	*6050 *13,100	3650 7,900	*4350 *9,350	2450 5,300	*2900 *6,350	2100 4,600	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	*6450 *14,000	*5000 *10,750	3600 7,800	*3350 *6,950	2450 5,300	*2900 *6,400	2350 5,150	6.25 20'5"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2600 mm (8'6") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4150 8,900			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4050 8,750	3750 *7,200	2550 5,400	*2550 *5,650	2350 5,200	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7050 15,200	5800 12,500	3800 8,200	3650 7,850	2450 5,250	*2500 *5,550	2000 4,400	6.79 22'2"
1.5 m 5.0 ft	kg lb			5450 11,750	3500 7,550	3500 7,550	2350 5,000	*2600 *5,750	1900 4,100	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5250 11,300	3300 7,150	3450 7,350	2250 4,850	2900 6,350	1900 4,200	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	6000 12,900	*5000 *10,750	3300 7,050	*3350 *6,950	2250 4,800	*2900 *6,400	2150 4,700	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2600 mm (8'6") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	*4550 *9,700			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4500 9,650	*3800 *7,200	2800 5,950	*2550 *5,650	*2550 *5,650	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7950 17,150	*5950 *12,900	4250 9,100	*4400 *9,500	2700 5,850	*2500 *5,550	2250 4,900	6.79 22'2"
1.5 m 5.0 ft	kg lb			*6300 *13,700	3900 8,450	*4650 *10,050	2600 5,600	*2600 *5,750	2100 4,600	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	*6050 *13,100	3750 8,000	*4350 *9,350	2500 5,400	*2900 *6,350	2150 4,650	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	*6450 *14,000	*5000 *10,750	3700 7,900	*3350 *6,950	2500 5,400	*2900 *6,400	2400 5,250	6.25 20'5"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2700 mm (8'10") Blade




		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
										
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4200 9,000			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4100 8,850	*3800 *7,200	2550 5,450	*2550 *5,650	2400 5,250	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7150 15,400	5900 12,650	3850 8,300	3700 7,950	2500 5,350	*2500 *5,550	2050 4,450	6.79 22'2"
1.5 m 5.0 ft	kg lb			5550 11,900	3550 7,650	3550 7,650	2350 5,100	*2600 *5,750	1900 4,200	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5350 11,450	3350 7,250	3500 7,450	2300 4,900	*2900 *6,350	1950 4,250	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	6100 13,100	*5000 *10,750	3350 7,150	*3350 *6,950	2300 4,900	*2900 *6,400	2150 4,750	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
										
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	*4550 *9,700			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4650 10,000	*3800 *7,200	2900 6,200	*2550 *5,650	*2550 *5,650	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	8300 17,850	*5950 *12,900	4400 9,400	*4400 *9,500	2800 6,050	*2500 *5,550	2300 5,100	6.79 22'2"
1.5 m 5.0 ft	kg lb			*6300 *13,700	4050 8,750	*4650 *10,050	2700 5,800	*2600 *5,750	2150 4,750	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	*6050 *13,100	3900 8,350	*4350 *9,350	2600 5,600	*2900 *6,350	2200 4,850	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	*6450 *14,000	*5000 *10,750	3850 8,250	*3350 *6,950	2600 5,600	*2900 *6,400	2450 5,450	6.25 20'5"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2700 mm (8'10") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
										
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	4250 9,100			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4150 8,900	*3800 *7,200	2600 5,550	*2550 *5,650	2400 5,300	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	7200 15,500	5950 12,750	3900 8,350	3750 8,050	2500 5,400	*2500 *5,550	2050 4,500	6.79 22'2"
1.5 m 5.0 ft	kg lb			5600 12,050	3600 7,750	3600 7,750	2400 5,150	*2600 *5,750	1950 4,250	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	5400 11,550	3400 7,350	3500 7,550	2300 4,950	*2900 *6,350	1950 4,300	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	6150 13,200	*5000 *10,750	3350 7,250	*3350 *6,950	2300 4,950	*2900 *6,400	2200 4,800	6.25 20'5"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
										
7.5 m 25.0 ft	kg lb	*4650 *9,100	*4650 *9,100					*3700 *8,500	*3700 *8,500	3.36 10'2"
6.0 m 20.0 ft	kg lb	*4650 *10,300	*4650 *10,300	*4550 *9,700	*4550 *9,700			*2800 *6,250	*2800 *6,250	5.26 16'11"
4.5 m 15.0 ft	kg lb	*5050 *10,900	*5050 *10,900	*5300 *11,450	4700 10,050	*3800 *7,200	2950 6,250	*2550 *5,650	*2550 *5,650	6.26 20'4"
3.0 m 10.0 ft	kg lb	*8900 *19,200	8350 18,000	*5950 *12,900	4400 9,500	*4400 *9,500	2850 6,100	*2500 *5,550	2350 5,150	6.79 22'2"
1.5 m 5.0 ft	kg lb			*6300 *13,700	4100 8,850	*4650 *10,050	2750 5,850	*2600 *5,750	2200 4,800	6.95 22'9"
0 m 0 ft	kg lb	*5200 *12,150	*5200 *12,150	*6050 *13,100	3900 8,450	*4350 *9,350	2650 5,650	*2900 *6,350	2250 4,900	6.79 22'2"
-1.5 m -5.0 ft	kg lb	*6450 *14,000	*6450 *14,000	*5000 *10,750	3900 8,350	*3350 *6,950	2650 5,650	*2900 *6,400	2500 5,500	6.25 20'5"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4050 8,750	3750 *8,000	2550 5,450	*2200 *4,850	2150 4,750	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7150 15,400	5800 12,450	3800 8,200	3650 7,800	2450 5,250	*2200 *4,800	1850 4,100	7.08 23'2"
1.5 m 5.0 ft	kg lb			5450 11,700	3500 7,550	3500 7,500	2350 5,000	*2250 *4,950	1750 3,850	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 12,650	5200 11,200	3300 7,100	3400 7,300	2250 4,750	*2500 *5,450	1800 3,900	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	5900 12,650	5150 11,000	3250 6,950	3350 7,200	2200 4,700	*2900 *6,400	1950 4,300	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4400 9,450	*3850 *8,000	2750 5,850	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7850 16,900	*5850 *12,550	4150 8,900	*4300 *9,250	2650 5,700	*2200 *4,800	2000 4,450	7.08 23'2"
1.5 m 5.0 ft	kg lb			*6300 *13,650	3800 8,200	*4650 *10,050	2550 5,400	*2250 *4,950	1900 4,200	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 *13,200	*6200 *13,400	3600 7,750	*4500 *9,650	2450 5,200	*2500 *5,450	1950 4,250	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6550 14,050	*5300 *11,450	3550 7,600	*3700 *7,850	2400 5,150	*2900 *6,400	2150 4,700	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4200 9,000	*3850 *8,000	2650 5,600	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7350 15,850	*5850 *12,550	3950 8,450	3750 8,100	2550 5,450	*2200 *4,800	1950 4,250	7.08 23'2"
1.5 m 5.0 ft	kg lb			5650 12,150	3600 7,800	3650 7,800	2400 5,150	*2250 *4,950	1800 4,000	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 13,100	5400 11,600	3400 7,350	3500 7,550	2300 4,950	*2500 *5,450	1850 4,050	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6100 13,100	*5300 11,400	3350 7,200	3500 7,500	2300 4,900	*2900 *6,400	2050 4,450	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4550 9,750	*3850 *8,000	2850 6,050	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	8100 17,400	*5850 *12,550	4250 9,150	*4300 *9,250	2750 5,900	*2200 *4,800	2100 4,600	7.08 23'2"
1.5 m 5.0 ft	kg lb			*6300 *13,650	3950 8,500	*4650 *10,050	2600 5,600	*2250 *4,950	2000 4,350	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 *13,200	*6200 *13,400	3750 8,050	*4500 *9,650	2500 5,400	*2500 *5,450	2000 4,400	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6800 14,550	*5300 *11,450	3650 7,900	*3700 *7,850	2500 5,350	*2900 *6,400	2200 4,850	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4150 8,950	3850 *8,000	2600 5,550	*2200 *4,850	2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7300 15,750	*5850 *12,550	3900 8,400	3750 8,050	2500 5,400	*2200 *4,800	1900 4,200	7.08 23'2"
1.5 m 5.0 ft	kg lb			5600 12,050	3600 7,750	3600 7,750	2400 5,150	*2250 *4,950	1800 3,950	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 13,050	5350 11,500	3400 7,300	3500 7,500	2300 4,900	*2500 *5,450	1850 4,000	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6050 13,000	5300 11,350	3300 7,150	3450 7,450	2250 4,850	*2900 *6,400	2000 4,450	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2500 mm (8'2") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4500 9,700	*3850 *8,000	2800 6,050	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	8050 17,300	*5850 *12,550	4250 9,100	*4300 *9,250	2750 5,850	*2200 *4,800	2100 4,600	7.08 23'2"
1.5 m 5.0 ft	kg lb			*6300 *13,650	3950 8,450	*4650 *10,050	2600 5,600	*2250 *4,950	1950 4,300	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 *13,200	*6200 *13,400	3700 8,000	*4500 *9,650	2500 5,350	*2500 *5,450	2000 4,350	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6750 14,450	*5300 *11,450	3650 7,800	*3700 *7,850	2450 5,300	*2900 *6,400	2200 4,850	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2600 mm (8'6") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
										
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	*4150 8,900	3800 *8,000	2600 5,550	*2200 *4,850	2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7250 15,650	*5850 *12,550	3900 8,350	3700 7,950	2500 5,350	*2200 *4,800	1900 4,200	7.08 23'2"
1.5 m 5.0 ft	kg lb			5550 11,900	3600 7,700	3550 7,650	2400 5,100	*2250 *4,950	1800 3,950	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 12,950	5300 11,400	3350 7,250	3450 7,400	2300 4,900	*2500 *5,450	1800 4,000	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6050 12,900	5250 11,200	3300 7,100	3400 7,350	2250 4,800	*2900 *6,400	2000 4,400	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2600 mm (8'6") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
										
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	*4550 9,850	*3850 *8,000	2850 6,100	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	8200 17,650	*5850 *12,550	4300 9,250	*4300 *9,250	2750 5,950	*2200 *4,800	2100 4,650	7.08 23'2"
1.5 m 5.0 ft	kg lb			*6300 *13,650	4000 8,600	*4650 *10,050	2650 5,650	*2250 *4,950	2000 4,350	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 *13,200	*6200 *13,400	3800 8,150	*4500 *9,650	2550 5,450	*2500 *5,450	2050 4,450	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6900 14,800	*5300 *11,450	3700 7,950	*3700 *7,850	2500 5,400	*2900 *6,400	2250 4,900	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2700 mm (8'10") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	4200 9,000	*3850 *8,000	2650 5,600	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7350 15,850	*5850 *12,550	3950 8,450	3750 8,050	2550 5,450	*2200 *4,800	1950 4,250	7.08 23'2"
1.5 m 5.0 ft	kg lb			5650 12,100	3650 7,800	3600 7,750	2400 5,200	*2250 *4,950	1800 4,000	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 13,150	5400 11,550	3400 7,350	3500 7,550	2300 4,950	*2500 *5,450	1850 4,050	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6100 13,100	5300 11,400	3350 7,200	3450 7,450	2300 4,900	*2900 *6,400	2050 4,500	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	*4550 *9,900	*3850 *8,000	2950 6,350	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	8500 18,350	*5850 *12,550	4450 9,600	*4300 *9,250	2850 6,150	*2200 *4,800	*2200 *4,800	7.08 23'2"
1.5 m 5.0 ft	kg lb			*6300 *13,650	4150 8,900	*4650 *10,050	2750 5,900	*2250 *4,950	2050 4,550	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 *13,200	*6200 *13,400	3950 8,450	*4500 *9,650	2650 5,650	*2500 *5,450	2100 4,600	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	*7150 15,400	*5300 *11,450	3850 8,300	*3700 *7,850	2600 5,600	*2900 *6,400	2300 5,100	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.




Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Up




2700 mm (8'10") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	*4250 9,100	*3850 *8,000	2650 5,650	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	7450 16,000	*5850 *12,550	3950 8,550	3800 8,150	2550 5,500	*2200 *4,800	1950 4,300	7.08 23'2"
1.5 m 5.0 ft	kg lb			5700 12,200	3650 7,900	3650 7,850	2450 5,250	*2250 *4,950	1850 4,050	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 *13,200	5450 11,700	3450 7,450	3550 7,600	2350 5,000	*2500 *5,450	1850 4,100	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	6200 13,250	*5300 *11,450	3400 7,300	3500 7,550	2300 4,950	*2900 *6,400	2050 4,550	6.57 21'6"

Variable Angle Boom Lift Capacities – Counterweight: 2.47 mt (5,445 lb) – without Bucket – Blade Down

2700 mm (8'10") Blade



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft				mm ft/in
7.5 m 25.0 ft	kg lb	*4450 *9,550	*4450 *9,550					*3000 *6,850	*3000 *6,850	3.93 12'2"
6.0 m 20.0 ft	kg lb	*4000 *8,850	*4000 *8,850	*4100 *8,900	*4100 *8,900			*2400 *5,350	*2400 *5,350	5.63 18'2"
4.5 m 15.0 ft	kg lb	*4100 *9,000	*4100 *9,000	*4550 *9,900	*4550 *9,900	*3850 *8,000	3000 6,400	*2200 *4,850	*2200 *4,850	6.57 21'5"
3.0 m 10.0 ft	kg lb	*8550 *18,400	*8550 *18,400	*5850 *12,550	4500 9,700	*4300 *9,250	2900 6,200	*2200 *4,800	*2200 *4,800	7.08 23'2"
1.5 m 5.0 ft	kg lb			*6300 *13,650	4200 9,000	*4650 *10,050	2750 5,950	*2250 *4,950	2100 4,600	7.24 23'8"
0 m 0 ft	kg lb	*5700 *13,200	*5700 *13,200	*6200 *13,400	3950 8,550	*4500 *9,650	2650 5,700	*2500 *5,450	2150 4,650	7.08 23'2"
-1.5 m -5.0 ft	kg lb	*7150 *15,500	*7150 *15,500	*5300 *11,450	3900 8,350	*3700 *7,850	2650 5,650	*2900 *6,400	2350 5,150	6.57 21'6"



ISO 10567:2007



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.

Lift capacity stays with $\pm 5\%$ for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

313 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Europe

	Linkage	Width		Capacity		Weight		Fill	2.47 mt (5,445 lb) Counterweight					
		mm	in	m³	yd³	kg	lb		%	Reach Boom			Variable Angle Boom	
										R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Pin-On (No Quick Coupler)														
General Duty	312	600	24	0.31	0.40	316	696	100	●	●	●	●	●	
	312	900	36	0.53	0.69	414	914	100	●	●	●	●	●	
	312	1000	39	0.60	0.78	438	967	100	●	●	●	●	●	
	312	1100	43	0.68	0.89	474	1,045	100	●	●	⊙	⊙	⊙	
	312	1200	48	0.76	1.00	504	1,110	100	X	X	X	X	X	
General Duty (Without Adjuster GP)	312	450	18	0.20	0.26	266	587	100	●	●	●	●	●	
	312	600	24	0.31	0.40	310	684	100	●	●	●	●	●	
	312	750	30	0.41	0.54	358	790	100	●	●	●	●	●	
	312	900	36	0.53	0.69	407	898	100	●	●	●	●	●	
	312	1050	42	0.65	0.84	457	1,006	100	●	●	⊙	⊙	⊙	
	312	1200	48	0.76	1.00	497	1,095	100	X	X	X	X	X	
Heavy Duty	312	450	18	0.20	0.27	279	615	100	●	●	●	●	●	
	312	1200	48	0.76	0.99	513	1,131	100	⊙	⊙	⊖	⊖	⊖	
Ditch Cleaning	312	1800	72	0.68	0.89	540	1,191	100	●	⊙	⊖	⊙	⊖	
Ditch Cleaning Tilt	312	1800	72	0.60	0.78	724	1,597	100	●	⊙	⊖	⊖	⊖	
Maximum load pin-on (payload + bucket)								kg	1930	1890	1680	1750	1660	
								lb	4,264	4,165	3,696	3,859	3,650	
With Cat Pin Grabber Coupler														
General Duty	312	600	24	0.31	0.40	316	696	100	●	●	●	●	●	
	312	900	36	0.53	0.69	414	914	100	●	●	●	●	●	
	312	1000	39	0.60	0.78	438	967	100	●	●	⊙	⊙	⊙	
	312	1100	43	0.68	0.89	474	1,045	100	⊙	⊙	⊖	⊖	⊖	
	312	1200	48	0.76	1.00	504	1,110	100	⊖	⊖	○	○	○	
General Duty	312	450	18	0.20	0.26	266	587	100	●	●	●	●	●	
	312	600	24	0.31	0.40	310	684	100	●	●	●	●	●	
	312	750	30	0.41	0.54	358	790	100	●	●	●	●	●	
	312	900	36	0.53	0.69	407	898	100	●	●	●	●	●	
	312	1050	42	0.65	0.84	457	1,006	100	⊙	⊙	⊖	⊖	⊖	
	312	1200	48	0.76	1.00	497	1,095	100	⊖	⊖	○	○	○	
Heavy Duty	312	450	18	0.20	0.27	279	615	100	●	●	●	●	●	
	312	1200	48	0.76	0.99	513	1,131	100	⊖	⊖	○	○	○	
Ditch Cleaning	312	1800	72	0.68	0.89	540	1,191	100	⊙	⊖	○	⊖	○	
Ditch Cleaning Tilt	312	1800	72	0.60	0.78	724	1,597	100	⊖	⊖	○	○	○	
Maximum load with coupler (payload + bucket)								kg	1734	1690	1477	1551	1456	
								lb	3,823	3,725	3,256	3,419	3,209	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

313 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Europe (continued)

	Linkage	Width		Capacity		Weight		Fill	2.47 mt (5,445 lb) Counterweight					
		mm	in	m³	yd³	kg	lb		%	Reach Boom			Variable Angle Boom	
										R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
With CW20 Coupler														
General Duty	312	600	24	0.31	0.40	341	752	100	●	●	●	●	●	
	312	900	36	0.53	0.69	426	940	100	●	●	⊙	●	⊙	
	312	1100	43	0.68	0.89	487	1,073	100	⊙	⊙	⊖	⊖	⊖	
	312	1200	48	0.76	1.00	516	1,137	100	⊖	⊖	○	○	○	
Heavy Duty	312	1200	48	0.76	1.00	526	1,159	100	⊖	⊖	○	○	○	
General Duty – Leveling Edge	312	690	27	0.40	0.52	413	910	100	●	●	●	●	●	
	312	600	24	0.33	0.43	395	870	100	●	●	●	●	●	
	312	790	31	0.47	0.61	455	1,003	100	●	●	●	●	●	
	312	996	39	0.63	0.83	517	1,140	100	⊙	⊙	⊖	⊖	⊖	
	312	1184	47	0.80	1.05	603	1,328	100	○	○	◇	○	◇	
Ditch Cleaning	312	1800	72	0.68	0.89	516	1,138	100	⊙	⊙	○	⊖	○	
	312	1800	72	0.90	1.18	554	1,221	100	○	○	◇	◇	◇	
Maximum load with coupler (payload + bucket)								kg	1729	1684	1471	1545	1451	
								lb	3,812	3,713	3,244	3,407	3,198	
With CW20S Coupler														
General Duty	312	450	18	0.20	0.26	301	664	100	●	●	●	●	●	
	312	500	20	0.24	0.31	310	684	100	●	●	●	●	●	
	312	600	24	0.31	0.40	329	726	100	●	●	●	●	●	
	312	750	30	0.41	0.54	377	830	100	●	●	●	●	●	
	312	900	36	0.53	0.69	426	940	100	●	●	⊙	●	⊙	
	312	1000	39	0.60	0.78	451	995	100	●	●	⊖	⊙	⊖	
	312	1100	43	0.68	0.89	487	1,073	100	⊙	⊙	⊖	⊖	⊖	
	312	1200	48	0.76	1.00	516	1,137	100	⊖	⊖	○	○	○	
Heavy Duty	312	500	20	0.24	0.31	313	689	100	●	●	●	●	●	
	312	1200	48	0.76	1.00	524	1,154	100	⊖	⊖	○	○	○	
Ditch Cleaning	312	1800	72	0.68	0.89	548	1,207	100	⊙	⊖	○	⊖	○	
	312	2000	78	1.00	1.31	630	1,389	100	◇	◇	X	◇	X	
Ditch Cleaning Tilt	312	1800	72	0.60	0.78	822	1,812	100	⊖	⊖	◇	○	◇	
Maximum load with coupler (payload + bucket)								kg	1751	1706	1493	1567	1473	
								lb	3,860	3,762	3,292	3,456	3,246	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

313 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Europe *(continued)*

	Linkage	Width		Capacity		Weight		Fill	2.47 mt (5,445 lb) Counterweight					
		mm	in	m³	yd³	kg	lb		%	Reach Boom			Variable Angle Boom	
										R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Pin On, TRS10 CW20														
Grading – General Duty	312	1600	63	0.76	0.99	571	1,259	100	●	●	●	●	●	
Maximum load with coupler (payload + bucket)								kg	3719	3620	3151	3314	3105	
								lb	8,198	7,982	6,946	7,306	6,845	
Pin On, TRS10 CW20S														
Grading – General Duty	312	1500	59	0.65	0.85	528	1,164	100	○	○	◇	◇	◇	
Trenching – General Duty	312	540	21	0.37	0.48	336	740	100	●	●	●	●	●	
Maximum load with coupler (payload + bucket)								kg	1378	1333	1120	1194	1100	
								lb	3,038	2,940	2,470	2,633	2,424	
Pin On, TRS10 S60														
Grading – Heavy Duty	312	1500	59	0.52	0.68	511	1,127	100	⊙	⊙	○	⊖	○	
	312	1500	59	0.65	0.85	535	1,179	100	⊖	⊖	◇	○	◇	
	312	1600	63	0.75	0.98	576	1,270	100	○	○	◇	◇	◇	
Trenching – Heavy Duty	312	540	21	0.33	0.43	320	706	100	●	●	●	●	●	
Maximum load with coupler (payload + bucket)								kg	1507	1462	1249	1323	1229	
								lb	3,322	3,224	2,754	2,918	2,708	
With CW20S, TRS10 CW20S														
Grading – Heavy Duty	312	1500	59	0.65	0.85	528	1,164	100	◇	◇	X	X	X	
Trenching – Heavy Duty	312	540	21	0.37	0.48	336	740	100	●	●	⊖	⊙	⊖	
Maximum load with coupler (payload + bucket)								kg	1185	1140	927	1001	907	
								lb	2,612	2,514	2,045	2,208	1,998	
With S60, TRS10 S60														
Grading – Heavy Duty	312	1500	59	0.52	0.68	511	1,127	100	⊖	⊖	◇	○	◇	
	312	1500	59	0.65	0.85	535	1,179	100	○	○	X	◇	X	
	312	1600	63	0.75	0.98	576	1,270	100	◇	◇	X	X	X	
Trenching – Heavy Duty	312	540	21	0.33	0.43	320	706	100	●	●	●	●	●	
Maximum load with coupler (payload + bucket)								kg	1347	1302	1089	1163	1069	
								lb	2,969	2,871	2,402	2,565	2,356	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

313 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Australia and New Zealand

	Linkage	Width		Capacity		Weight		Fill	2.47 mt (5,445 lb) Counterweight				
		mm	in	m³	yd³	kg	lb		%	Reach Boom			
										R2.5 (8'2")	R3.0 (9'10")	R2.5 (8'2")	R3.0 (9'10")
Pin-On (No Quick Coupler)													
General Duty	312	450	18	0.20	0.26	266	587	100	●	●	●	●	
	312	600	24	0.31	0.40	310	684	100	●	●	●	●	
	312	750	30	0.41	0.54	358	790	100	●	●	●	●	
	312	750	30	0.41	0.54	410	903	100	●	●	●	●	
	312	900	36	0.53	0.69	407	898	100	●	●	●	●	
	312	900	36	0.53	0.69	451	994	100	●	●	●	●	
	312	1050	42	0.65	0.84	457	1,006	100	●	⊙	●	⊙	
Clean Up	312	1500	60	1.02	1.33	651	1,435	100	○	◇	○	◇	
	312	1800	72	1.29	1.68	748	1,649	100	X	X	◇	X	
Ditch Cleaning Tilt	312	1500	60	0.74	0.98	704	1,553	100	⊖	○	⊖	○	
	312	1800	72	0.90	1.18	784	1,728	100	○	◇	○	◇	
Maximum load pin-on (payload + bucket)								kg	1850	1640	1890	1680	
								lb	4,075	3,612	4,165	3,696	
With Cat Pin Grabber Coupler													
General Duty	312	450	18	0.20	0.26	266	587	100	●	●	●	●	
	312	600	24	0.31	0.40	310	684	100	●	●	●	●	
	312	750	30	0.41	0.54	358	790	100	●	●	●	●	
	312	750	30	0.41	0.54	410	903	100	●	●	●	●	
	312	900	36	0.53	0.69	407	898	100	●	⊙	●	●	
	312	900	36	0.53	0.69	451	994	100	●	⊙	●	⊙	
	312	1050	42	0.65	0.84	457	1,006	100	⊙	⊖	⊙	⊖	
Clean Up	312	1500	60	1.02	1.33	651	1,435	100	◇	X	◇	X	
	312	1800	72	1.29	1.68	748	1,649	100	X	X	X	X	
Ditch Cleaning Tilt	312	1500	60	0.74	0.98	704	1,553	100	○	◇	○	◇	
	312	1800	72	0.90	1.18	784	1,728	100	◇	X	◇	X	
Maximum load with coupler (payload + bucket)								kg	1649	1439	1690	1477	
								lb	3,635	3,172	3,725	3,256	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

313 Hydraulic Excavator Specifications

Attachments Offering Guide – Europe

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match

☒ Working range front only

☐ 1200 kg/m³ (2,000 lb/yd³)

☐ No Match

PIN-ON ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)				
Boom Type		Reach			Variable Angle	
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 GC S	✓	✓	✓	✓	✓
	H110 S	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G312 GC	✓	✓	✓		
	G313 GC	✓	✓	✓*		
	G314	✓	✓	✓*		
Mobile Scrap and Demolition Shears	S3015	✓	✓	✓		
	S3015 Flat Top	✓	✓	✓*		
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓
Orange Peel Grapples	GSV520 GC-400	○	○		○	○
	GSV520 GC-500	○				

CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)				
Boom Type		Reach			Variable Angle	
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 GC S	✓	✓	✓	✓	✓
	H110 S	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓*		
	H115 S	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G312 GC	✓	✓			
	G313 GC	✓*	✓*			
Mobile Scrap and Demolition Shears	S3015	✓	✓*			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓

(continued on next page)

313 Hydraulic Excavator Specifications

Attachments Offering Guide – Europe *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match

☒ * Working range front only

☐ No Match

CW-20S DEDICATED COUPLER ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)				
Boom Type		Reach			Variable Angle	
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 GC S	✓	✓	✓		
	H110 S	✓	✓	✓	✓	✓
	H115 GC S	✓	✓			
	H115 S	✓	✓	✓		
Demolition and Sorting Grapples	G312 GC	✓	✓	✓*	✓*	
	G313 GC	✓	✓			
	G314	✓*	✓*			
Mobile Scrap and Demolition Shears	S3015	✓*	✓*			
	S3015 Flat Top	✓*	✓*			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓

CW-20 DEDICATED COUPLER ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)				
Boom Type		Reach			Variable Angle	
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 GC S	✓	✓	✓	✓	✓
	H110 S	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓*		
	H115 S	✓	✓	✓		
Demolition and Sorting Grapples	G312 GC	✓	✓	✓*	✓*	
	G313 GC	✓*	✓*			
	G314	✓*	✓*			
Mobile Scrap and Demolition Shears	S3015	✓*				
	S3015 Flat Top	✓*				
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓

(continued on next page)

313 Hydraulic Excavator Specifications

Attachments Offering Guide – Europe *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match

☒ Working range front only

☐ No Match

S60 DEDICATED COUPLER ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)				
Boom Type		Reach			Variable Angle	
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 GC S	✓	✓	✓	✓	✓
	H110 S	✓	✓	✓	✓	✓
	H115 GC S	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G312 GC	✓	✓	✓*		
	G313 GC	✓	✓			
	G314	✓*	✓*			
Mobile Scrap and Demolition Shears	S3015 Flat Top	✓*	✓*			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓

HCS60 Coupler Attachments

Counterweight		2.47 mt (5,445 lb)				
Boom Type		Reach			Variable Angle	
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G312 GC	✓	✓			
	G313 GC	✓*	✓*			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓

HCS65 Coupler Attachments

Counterweight		2.47 mt (5,445 lb)				
Boom Type		Reach			Variable Angle	
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 S	✓	✓	✓	✓	✓
	H115 S	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G312 GC	✓*	✓*			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓

TRS10-CW-20S ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)		
Boom Type		Reach		
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")
Hydraulic Hammers	H110 S	✓*	✓*	
Demolition and Sorting Grapples	G212 GC	✓*	✓*	
Compactors (Vibratory Plate)	CVP75	✓	✓	✓

(continued on next page)

313 Hydraulic Excavator Specifications

Attachments Offering Guide – Europe *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match

☒ Working range front only

☐ No Match

TRS10-CW-20 ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)	
Boom Type		Reach	
Stick Length		R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 GC S	✓*	
	H110 S	✓*	✓*
Demolition and Sorting Grapples	G212 GC	✓*	✓*
Compactors (Vibratory Plate)	CVP75	✓	✓

TRS10-S60 COUPLER ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)				
Boom Type		Reach			Variable Angle	
Stick Length		R2.2 (7'3")	R2.5 (8'2")	R3.0 (9'10")	R2.2 (7'3")	R2.5 (8'2")
Hydraulic Hammers	H110 GC S	✓	✓	✓*		
	H110 S	✓	✓	✓*		
Demolition and Sorting Grapples	G212 GC	✓	✓			
	G213 GC	✓*	✓*			
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓

BOOM-MOUNT ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)	
Boom Type		Reach	Variable Angle
Mobile Scrap and Demolition Shears	S3025	✓	✓

313 Hydraulic Excavator Specifications

Attachments Offering Guide – Australia and New Zealand

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

☒ Match

☒ * Working range front only

☐ No Match

S60 DEDICATED COUPLER ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)	
Boom Type		Reach	
Stick Length		R2.5 (8'2")	R3.0 (9'10")
Hydraulic Hammers	H110 GC	✓	✓
	H110 GC S	✓	✓
	H110 S	✓	✓
	H115 GC	✓	✓
	H115 GC S	✓	✓
	H115 S	✓	✓
Demolition and Sorting Grapples	G314	✓	✓*
Mobile Scrap and Demolition Shears	S3015	✓	✓

CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)	
Boom Type		Reach	
Stick Length		R2.5 (8'2")	R3.0 (9'10")
Hydraulic Hammers	H110 GC	✓	✓
	H110 GC S	✓	✓
	H110 S	✓	✓
	H115 GC	✓	
	H115 GC S	✓	✓*
	H115 S	✓	✓
Mobile Scrap and Demolition Shears	S3015	✓*	

BOOM-MOUNT ATTACHMENTS

Counterweight		2.47 mt (5,445 lb)	
Boom Type		Reach	
Mobile Scrap and Demolition Shears	S3025	✓	

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			ELECTRICAL SYSTEM		
Variable Angle boom (2.4 m [7'8"] stub + 2.44 [8'0"] fore) ¹		✓	Maintenance free battery	✓	
4.65 m (15'3") Reach boom		✓	Centralized electrical disconnect switch	✓	
2.2 m (7'3") Reach stick ⁽¹⁾		✓	LED chassis light, left-side/right-side boom light, cab lights	✓	
2.5 m (8'2") Reach stick		✓	Programmable time-delay LED working lights	✓	
3.0 m (9'8") Reach stick		✓	360° lighting		✓
Bucket linkage, with lifting eye, Cat Grade	✓		ENGINE		
CAT TECHNOLOGY			Three selectable modes: Power, Smart, Eco	✓	
Cat Product Link™	✓		One-touch low idle with automatic engine speed control	✓	
Work tool recognition	✓		Auto engine shutdown	✓	
Work tool tracking*	✓		52° C (125° F) high-ambient cooling capacity without derate	✓	
Cat Grade with 2D and offset memory	✓		-25° C (-13° F) cold start capability ¹	✓	
Cat Grade with Advanced 2D		✓	-18° C (-0° F) cold start capability ²	✓	
Cat Grade with 3D connectivity		✓	Electric fuel priming pump	✓	
– Virtual Reference Station**			Variable speed fan	✓	
– Internet Base Service Station**			Single fuel filtration system	✓	
– Trimble Connected Community**			Sealed double element air filter with integrated pre-cleaner	✓	
Cat Payload:	✓		Biodiesel capability up to B20	✓	
– Static weigh					
– Semiautomatic calibration					
– Payload/cycle information					
– USB reporting capability					
2D E-Fence:	✓				
– E-ceiling					
– E-floor					
– E-swing					
– E-wall					
– E-cab avoidance					
Auto hammer stop	✓				

*Paired with PL161 attachment locator.

**Subscription required.

¹Europe only.

¹Europe only.

²Australia and New Zealand only.

313 Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
HYDRAULIC SYSTEM			UNDERCARRIAGE AND STRUCTURES		
Boom and stick regeneration circuits	✓		Grease lubricated track link	✓	
Automatic hydraulic oil warm up	✓		Center track guiding guards	✓	
Automatic two-speed travel	✓		Bottom guards	✓	
Electric main control valve	✓		Travel motor guards	✓	
Boom and stick drift reduction valve	✓		Swivel guards	✓	
Swing drive, without fine swing control function	✓		500 mm (20") triple grouser track shoes	✓	
Boom and stick lowering check valves		✓	500 mm (20") triple grouser track shoes with rubber pad		✓
Medium-pressure line		✓	500 mm (20") rubber track shoe		✓
High-pressure line		✓	600 mm (24") triple grouser track shoes		✓
Quick coupler line		✓	700 mm (28") triple grouser track shoes		✓
SAFETY AND SECURITY			770 mm (30") triple grouser track shoes ¹		✓
Rear and right-side-view cameras		✓	2500 mm (8'2") blade		✓
360° visibility		✓	2600 mm (8'6") blade		✓
Ground level engine shutoff switch	✓		2700 mm (8'10") blade		✓
Service platform with anti-skid plate and countersunk bolts	✓		2.47 mt (5,445 lb) counterweight	✓	
Signaling/warning horn	✓		ISO 15818:2017 tie-down points on base frame	✓	
Hydraulic lock out lever	✓				
SERVICE AND MAINTENANCE					
Side entry to service platform	✓				
Grouped engine oil and fuel filters	✓				
Ground level engine oil dipstick	✓				
S-O-S SM sampling ports	✓				

¹Europe only.

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Radial lower wiper (for deluxe cab only)
- Left-hand and right-hand electrical pedal (two-way) for tool control
- Dual exit rear window kit
- Rain protector plus cab light cover
- Front windshield laminated glass (P5A glass, EU demolition regulation)
- Key fob (for use with Bluetooth® receiver)

GUARDS

- FOGS (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Mesh guard lower half front
- Full protecting vandalism guard

SAFETY AND SECURITY

- 76 mm (3") retractable seat belt

313 Cab Options

Cab Options

	Deluxe	Premium
ROPS, sound suppressed with viscous mounts	●	●
High-resolution 254 mm (10") LCD touchscreen monitor	●	●
Additional high-resolution LCD touchscreen monitor for Cat Grade Advanced 2D and 3D	○	○
Automatic bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
Height-adjustable console, infinite with no tool	●	●
Tilt-up left-side console	●	●
Heated seat with air-adjustable suspension	●	X
Heated and cooled seat with automatic adjustable suspension	X	●
51 mm (2") orange seat belt	●	●
Bluetooth integrated radio (including USB, auxiliary port and microphone)	●	●
2 × 12V DC outlets	●	●
Document storage	●	●
Rear head storage net and lunchbox storage net	●	●
Cup and bottle holders	●	●
Fixed one-piece windshield	X	○
Two-piece front window, openable	●	○
Upper radial wiper with washer	●	X
Parallel wiper with washer	X	●
Openable polycarbonate skylight hatch	●	○
Fixed glass laminated skylight	X	○
LED dome light	●	●
Floor welcome light	●	●
Roller front sunscreen	●	●
Roller rear sunscreen	○	●
Rear window emergency exit	●	●
Washable floor mat	●	●
Beacon ready	●	●

● Standard

○ Optional

X Not available

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2021 Caterpillar
All rights reserved

AEXQ2875-03 (01-2021)
Replaces AEXQ2875-02
Build Number: 07B
(Eur, Aus-NZ)

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

