

330 GC

HYDRAULIC EXCAVATOR



Engine Power
Operating Weight

151 kW (202 hp)
30 600 kg (67,460 lb)

Cat® C7.1 engine meets U.S. EPA Tier 4 Final, EU Stage V, Japan 2014 (Tier 4 Final) and Korea Tier 4 Final emission standards with an aftertreatment system that requires no operator input or downtime.



NEXT GENERATION EXCAVATORS

Cat® Next Generation Excavators offer you more choices than ever for your business.

- + MORE MODEL OPTIONS
- + MORE STANDARD TECHNOLOGIES
- + MORE PRICE POINTS

Ready to help you make your business stronger, Cat Next Generation Excavators give you ways to get the most work done at the lowest cost – so you put more money in your pocket.



THE CAT® 330 GC

RELIABLE. COMFORTABLE. PRODUCTIVE.

THE CAT 330 GC offers you the ideal balance of dependable performance, operator productivity features, and reduced costs. The Cat 330 GC is a smart choice for operations where high reliability and low-cost-per-hour performance are priorities.



REDUCE FUEL CONSUMPTION UP TO 12%¹

The precise combination of larger hydraulic pumps, an electronic main control valve, and electronically controlled cooling fans delivers top performance while burning less fuel.

WORK SMART. SAVE MONEY.

The Cat 330 GC is equipped with two modes to help manage fuel consumption for your specific applications – Power Mode and Smart Mode.

Power Mode delivers maximum productivity in high demand applications like truck loading and trenching.

Smart Mode automatically matches engine speed and hydraulic power to demand for the highest fuel efficiency in any application.


Operators can set and store their power mode preference using Operator ID. Owners can lock in the mode they want their operators to use to help manage fuel consumption.

¹ Compared to 330F.

FUEL SAVINGS ADD UP.

The Next Generation Cat 330 GC uses up to 12% less fuel than the 330F.

THE NEXT GENERATION CAT 330 GC USES 4400 L (1,160 GAL) LESS FUEL PER YEAR COMPARED TO THE CAT 330F.

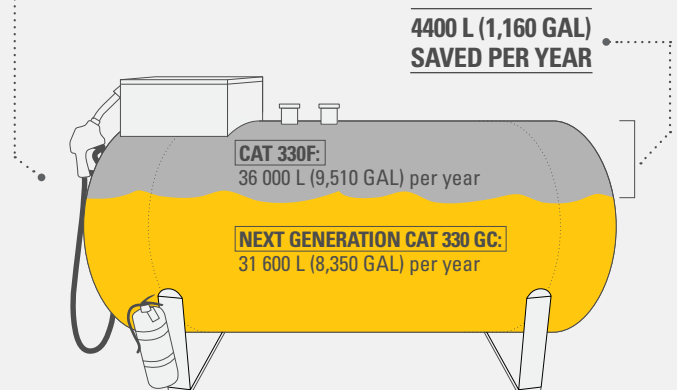

SCENARIO:

Based on 2,000 labor hours per year.

330F (AVERAGE): 18 L (4.8 GAL) PER HOUR × 2,000 HOURS/YEAR = 36 000 L (9,510 GAL) PER YEAR.
NEXT GENERATION 330 GC: 15.8 L (4.2 GAL) PER HOUR × 2,000 HOURS/YEAR = 31 600 L (8,350 GAL) PER YEAR; 36 000 L (9,510 GAL) PER YEAR – 31 600 L (8,350 GAL) PER YEAR = 4400 L (1,160 GAL) PER YEAR.

CAB TAKES

THE HARD OUT OF WORK

Sites where excavators typically work are rugged and challenging. That's why it's important that the 330 GC cab protects the operator as much as possible from the fatigue, stresses, sounds, and temperatures of the job.



ISO-CERTIFIED ROPS CAB

The ISO-certified ROPS cab is sound suppressed and sealed. The windows and lower front, right, and rear profile of the machine give outstanding visibility to the work area without the strain of constantly leaning forward.

ALL-AROUND VISIBILITY

Large windows at the front, sides, and rear give excellent visibility in all directions from the operator seat. The ROPS structure uses narrow front cab pillars to allow a wider field of view to the front. Plus, with the standard rearview and right-side cameras, operators will always be aware of what's surrounding the excavator.

EASY ACCESS, CONNECTIVITY, AND STORAGE

Several built-in convenience features make work more comfortable for operators:

- + Bluetooth® integrated radio
- + USB ports for charging and phone connectivity
- + 12V DC outlets and AUX port
- + Storage in rear, overhead, and console compartments
- + Cup and bottle holders




CUSTOMIZABLE JOYSTICKS

Joystick function can be customized through the monitor. Joystick pattern as well as response can be set to match operator preferences. All preferences are saved with the Operator ID and restored at login.



TOUCHSCREEN MONITOR

Most machine settings can be controlled through the high-resolution 203 mm/8-inch touchscreen monitor. It offers 42 languages and is easy to reach from the seat – no twisting or turning to reach switches. A handy jog dial control and shortcut keys are also ergonomically positioned on the right console.

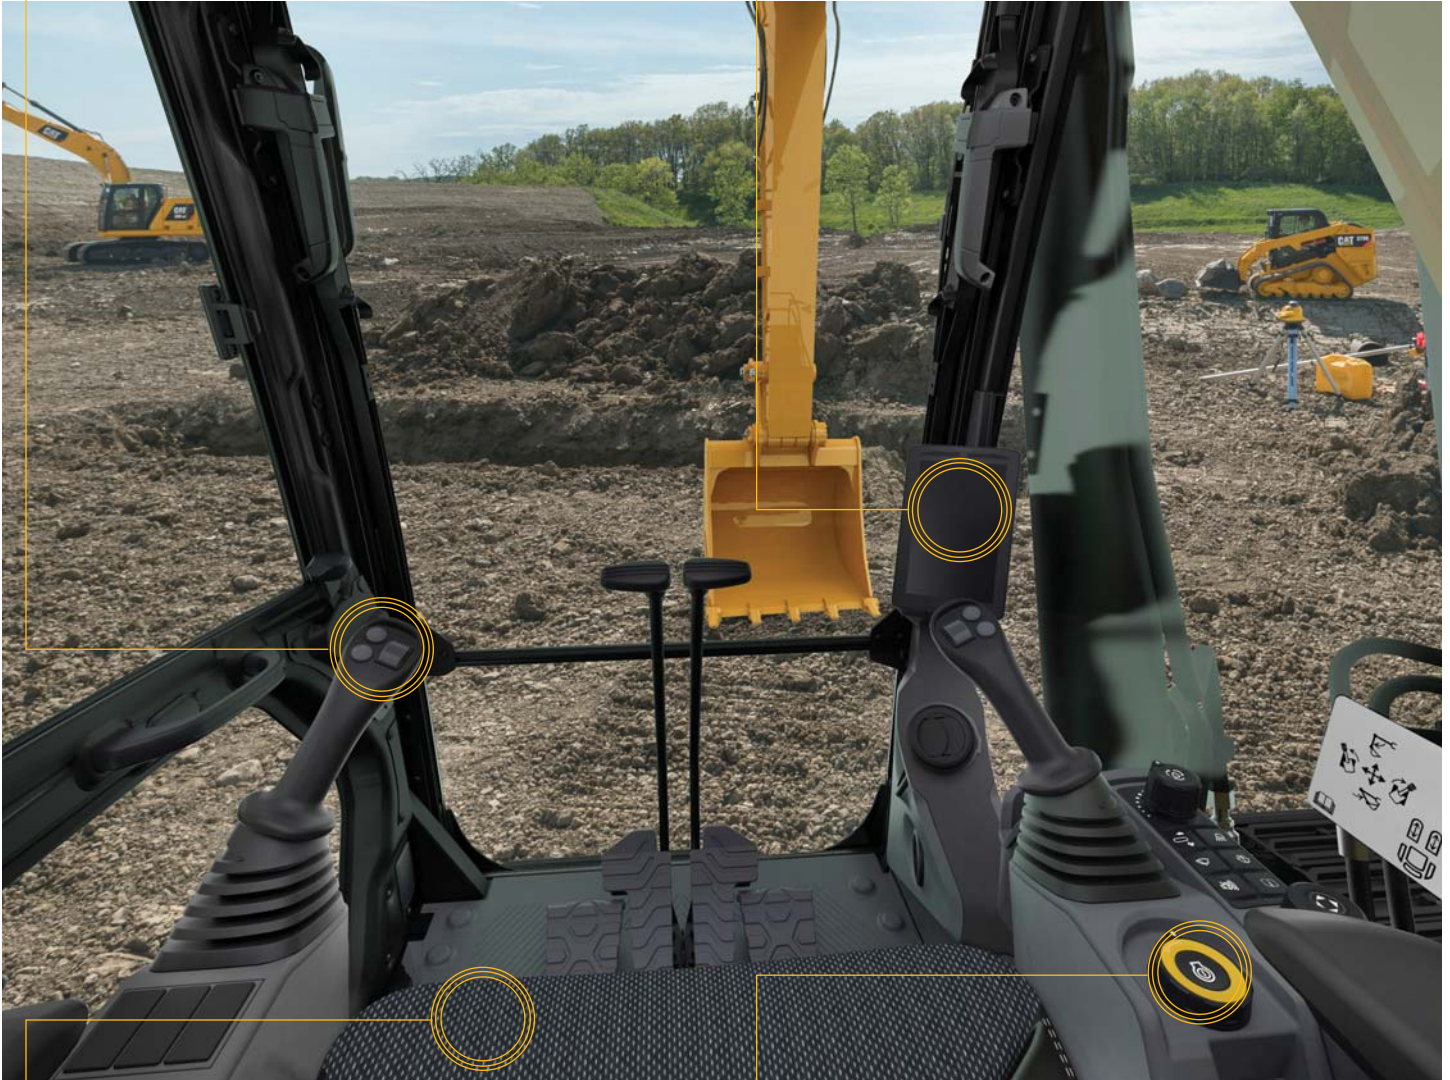

SEAT AND CONSOLE

Efficiency of movement is critical to keeping operators productive and alert all shift long. The 330 GC seat is designed for easy operation and comfort. The standard seat is wide and adjustable so operators of any size can work comfortably.



KEYLESS PUSH START

The 330 GC uses a keyless push-button engine start. This adds security for the machine by using Operator ID codes to limit and track machine access. Codes can be entered manually, via an optional Bluetooth key fob, or a smartphone app.



**LOWER MAINTENANCE COSTS
UP TO 20%**

With synchronized and extended maintenance intervals, you get more done at a lower cost compared to the 330F. Consolidated filter locations make service faster. Hydraulic, air, and fuel tank filters have increased capacity and longer life. Access to the operation and maintenance manual is easy through the in-cab monitor.


KEY MAINTENANCE COST REDUCTIONS INCLUDE:

- + Consolidated filter locations to reduce service time.
- + Improved hydraulic filter with higher dirt holding capacity.
- + Oil and fuel filters with extended maintenance intervals.
- + Advanced Cat air filter with double the dust holding capacity of the previous filter.
- + High-efficiency electric cooling fans only run when needed and reverse to keep cores free from debris. Choose between manual and auto reverse fan settings.

LESS RISK. MORE REWARD.

REDUCED CHANCE OF LEAKS AND DAMAGE WITH **FEWER CONNECTIONS AND LESS HOSE.**

THE NEXT GENERATION CAT 330 GC EXCAVATOR HAS **48 M (158 FT) LESS** HYDRAULIC HOSE THAN THE CAT 330F

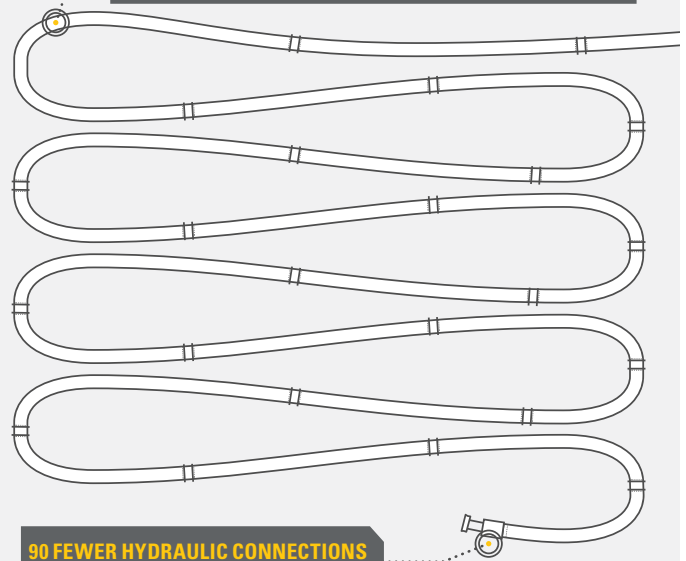


90 FEWER HYDRAULIC CONNECTIONS THAN THE CAT 330F

SAFETY FEATURES

LOOK OUT FOR YOUR PEOPLE
AND YOUR EQUIPMENT

Keep your people and your equipment safe with upper platform access, a ground-level engine oil dipstick, and secure start system on the Cat 330 excavator.

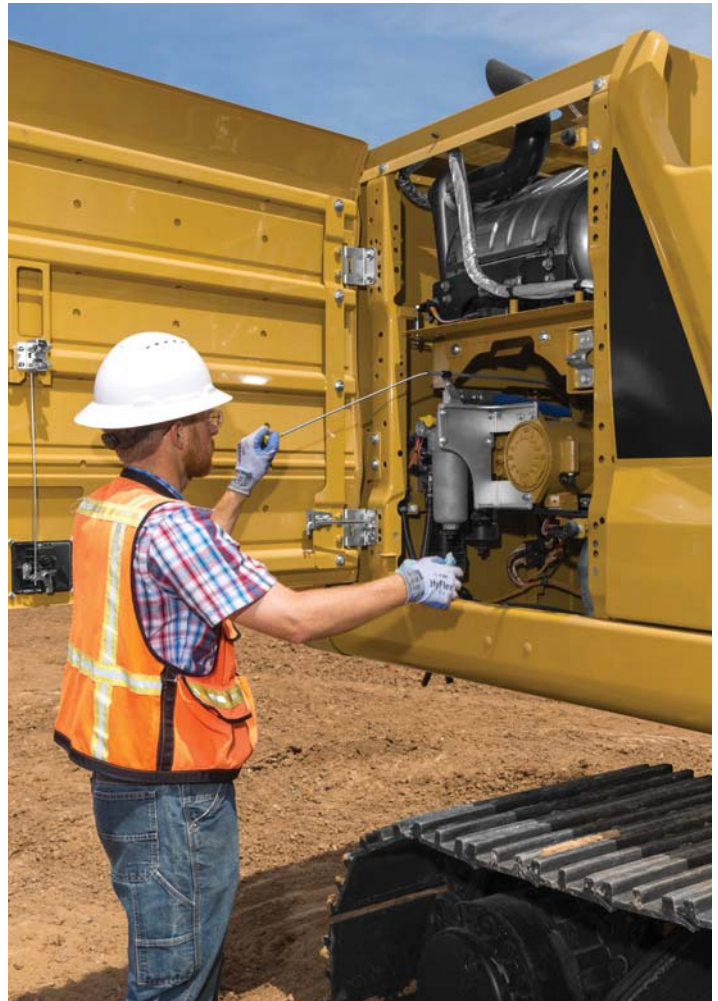

UPPER PLATFORM ACCESS

Access the upper platform from the entry point on the right side of the machine. The additional steps and handrails provide added support.

GROUND-LEVEL DAILY MAINTENANCE

All daily maintenance checks can be performed from ground level, making maintenance faster, easier, and safer. Checkpoints include the engine oil dipstick, fuel water separator, fuel tank water and sediment drains, and cooling system coolant level check.

SECURE START

Use your PIN code on the monitor, the optional Bluetooth key fob, or your smartphone to enable the push-button starting feature.

CAT LINK TECHNOLOGY

TAKES THE GUESSWORK OUT OF MANAGING YOUR EQUIPMENT

CAT LINK telematics technology helps take the complexity out of managing your jobsites – by gathering data generated by your equipment, materials, and people and serving it up to you in customizable formats.



PRODUCT LINK™

Product Link™ collects data automatically and accurately from your assets – any type and any brand. Information such as location, hours, fuel usage, productivity, idle time, maintenance alerts, diagnostic codes, and machine health can be viewed online through web and mobile applications.



VISIONLINK®

Access information anytime, anywhere with VisionLink® – and use it to make informed decisions that boost productivity, lower costs, simplify maintenance, and improve safety and security on your jobsite. With different subscription level options, your Cat dealer can help you configure exactly what you need to connect your fleet and manage your business without paying for extras you don't want. Subscriptions are available with cellular or satellite reporting (or both).

Caterpillar releases products, services, and technologies in each region at different time intervals. Please verify with your local Cat dealer for technology availability and specifications.

INCREASE YOUR PRODUCTIVITY AND PROFIT WITH CAT ATTACHMENTS

You can easily expand the performance of your machine by utilizing any of the variety of Cat Attachments. Each Cat Attachment is designed to fit the weight and horsepower of Cat Excavators for improved performance, safety, and stability.

BUCKETS



GRAPPLES



HYDRAULIC HAMMERS




PREVENT HAMMER WEAR AND TEAR

Protect your hammer from overworking. Auto hammer stop warns you after 15 seconds of continuous firing and then automatically shuts it off after 30 seconds – all to prevent wear and tear on the attachment and excavator.

MULTI-PROCESSORS



QUICK COUPLERS



RAKES



RIPPERS



ATTACHMENT TRACKING MADE EASY

The Cat PL161 Attachment Locator is a Bluetooth device that makes finding your attachments and other gear quick and easy. The Cat App on your phone will locate the device automatically.



**SECONDARY
PULVERIZERS**



SHEARS



THUMBS



**VIBRATORY PLATE
COMPACTORS**



TECHNICAL SPECIFICATIONS

See cat.com for complete specifications.

| ENGINE | | |
|--------------------------|----------|---------------------|
| Engine Model | Cat C7.1 | |
| Engine Power – ISO 9249 | 151 kW | 202 hp |
| Engine Power – ISO 14396 | 152 kW | 204 hp |
| Bore | 105 mm | 4 in |
| Stroke | 135 mm | 5 in |
| Displacement | 7.01 L | 428 in ³ |

| HYDRAULIC SYSTEM | | |
|--|------------|-------------|
| Main System – Maximum Flow (Implement) | 560 L/min | 148 gal/min |
| Maximum Pressure – Equipment | 35 000 kPa | 5,075 psi |
| Maximum Pressure – Travel | 35 000 kPa | 5,075 psi |
| Maximum Pressure – Swing | 28 400 kPa | 4,120 psi |

| SWING MECHANISM | | |
|----------------------|----------|---------------|
| Swing Speed | 11.5 rpm | |
| Maximum Swing Torque | 105 kN·m | 77,370 lbf·ft |

| WEIGHTS | | |
|---|-----------|-----------|
| Operating Weight* | 30 600 kg | 67,460 lb |
| *Long Undercarriage, Reach Boom, R3.2 (10'6") Stick, HD 1.54 m ³ (2.01 yd ³) bucket and 800 mm (31") triple grouser shoes. | | |
| Operating Weight* | 29 600 kg | 65,255 lb |
| *Long Undercarriage, Reach Boom, R3.2 (10'6") Stick, HD 1.54 m ³ (2.01 yd ³) bucket and 600 mm (24") triple grouser shoes. | | |

| SERVICE REFILL CAPACITIES | | |
|-----------------------------------|-------|-----------|
| Fuel Tank | 474 L | 125.2 gal |
| Cooling System | 25 L | 6.6 gal |
| Engine Oil | 25 L | 6.6 gal |
| Swing Drive | 10 L | 2.6 gal |
| Final Drive (each) | 5.5 L | 1.5 gal |
| Hydraulic System (including tank) | 310 L | 81.9 gal |
| Hydraulic Tank | 147 L | 38.8 gal |
| DEF Tank | 41 L | 10.8 gal |

AIR CONDITIONING SYSTEM

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.9 kg of refrigerant, which has a CO₂ equivalent of 1287 metric tonnes.

| DIMENSIONS | | |
|---|--|-------|
| Boom | Reach 6.15 m (20'2") | |
| Stick | Reach 3.2 m (10'6") | |
| Bucket | HD 1.54 m³ (2.01 yd³) | |
| Shipping Height (top of cab) | 3050 mm | 10'0" |
| Handrail Height | 3050 mm | 10'0" |
| Shipping Length | 10 420 mm | 34'2" |
| Tail Swing Radius | 3130 mm | 10'3" |
| Track Length to Center of Rollers – Standard Undercarriage* | 3490 mm | 11'5" |
| Track Length to Center of Rollers – Long Undercarriage | 3990 mm | 13'1" |
| Ground Clearance | 490 mm | 1'7" |
| Track Gauge – Standard Undercarriage* | 2390 mm | 7'10" |
| Track Gauge – Long Undercarriage | 2590 mm | 8'6" |
| Transport Width – 600 mm (24") Shoes, Standard Undercarriage* | 2990 mm | 9'10" |
| Transport Width – 600 mm (24") Shoes, Long Undercarriage | 3190 mm | 10'6" |
| Transport Width – 800 mm (31") Shoes, Standard Undercarriage* | 3190 mm | 10'6" |
| Transport Width – 800 mm (31") Shoes, Long Undercarriage | 3390 mm | 11'1" |
| Counterweight Clearance | 1110 mm | 3'8" |
| *Japan only | | |

| WORKING RANGES AND FORCES | | |
|---|--|------------|
| Boom | Reach 6.15 m (20'2") | |
| Stick | Reach 3.2 m (10'6") | |
| Bucket | HD 1.54 m³ (2.01 yd³) | |
| Maximum Digging Depth | 7260 mm | 23'10" |
| Maximum Reach at Ground Level | 10 690 mm | 35'1" |
| Maximum Cutting Height | 10 020 mm | 32'11" |
| Maximum Loading Height | 6940 mm | 22'9" |
| Minimum Loading Height | 2280 mm | 7'6" |
| Maximum Depth Cut for 2440 mm (8') Level Bottom | 7100 mm | 23'4" |
| Maximum Vertical Wall Digging Depth | 6030 mm | 19'9" |
| Bucket Digging Force (ISO) | 179 kN | 40,200 lbf |
| Stick Digging Force (ISO) | 126 kN | 28,300 lbf |

STANDARD & OPTIONAL EQUIPMENT

Standard and optional equipment may vary. Consult your Cat dealer for details.

| CAB | STANDARD | OPTIONAL |
|---|----------|----------|
| ROPS, standard sound suppression | • | |
| Mechanically adjustable seat | • | |
| High-resolution 203 mm (8 in) LCD touchscreen monitor | • | |
| CAT TECHNOLOGY | STANDARD | OPTIONAL |
| Cat Product Link | • | |
| Auto Hammer Stop | • | |
| ENGINE | STANDARD | OPTIONAL |
| Two selectable power modes | • | |
| Auto engine speed control | • | |
| Auto engine idle shutdown | • | |
| 52° C (125° F) high-ambient cooling capacity | • | |
| -32° C (-25° F) cold start capability | | • |
| Double element air filter with integrated precleaner | • | |
| Reversing electric cooling fans | • | |
| Biodiesel capability up to B20 | • | |
| HYDRAULIC SYSTEM | STANDARD | OPTIONAL |
| Boom and stick regeneration circuits | • | |
| Auto hydraulic warm up | • | |
| Auto two-speed travel | • | |
| Boom and stick drift reduction valve | • | |
| Boom and stick lowering check valves | | • |
| Hammer return filter circuit | | • |
| Tool Control (two pump, one/two way high-pressure flow) | •* | • |
| Medium-pressure circuit | | • |
| Quick coupler circuit | | • |
| *Europe only | | |

| BOOM AND STICKS | STANDARD | OPTIONAL |
|--|----------|----------|
| 6.15 m (20'2") reach boom, 3.75 m (12'4") reach stick | | • |
| 6.15 m (20'2") reach boom, 3.2 m (10'6") reach stick | | • |
| 6.15 m (20'2") reach boom, 2.65 m (8'8") reach stick | | • |
| UNDERCARRIAGE AND STRUCTURES | STANDARD | OPTIONAL |
| 600 mm (24") triple grouser shoes | | • |
| 800 mm (31") triple grouser shoes | | • |
| Tie-down points on base frame | • | |
| 6700 kg (14,770 lb) counterweight (all regions except Japan) | • | |
| 5800 kg (12,790 lb) counterweight (Japan only) | • | |
| ELECTRICAL SYSTEM | STANDARD | OPTIONAL |
| Two 1,000 CCA maintenance free batteries | • | |
| Programmable time-delay LED working lights | • | |
| LED chassis light, left-hand/right-hand boom lights, cab lights | • | |
| SERVICE AND MAINTENANCE | STANDARD | OPTIONAL |
| Sampling ports for Scheduled Oil Sampling (S-O-S SM) | • | |
| Ground-level and platform-level engine oil dipsticks | • | |
| Electric refueling pump with auto shutoff | | • |
| SAFETY AND SECURITY | STANDARD | OPTIONAL |
| Rearview camera | • | |
| Right-hand-sideview camera | • | |
| Ground-level engine shutoff switch | • | |
| Right-hand handrail and hand hold | • | |
| Signaling/warning horn | • | |

Not all features are available in all regions. Please check with your local Cat dealer for specific offering availability in your area.

For additional information and additional regional offerings, refer to the Technical Specifications brochure available at www.cat.com or your Cat dealer.

For more complete information on Cat products, dealer services and industry solutions, visit us on the web at www.cat.com

© 2020 Caterpillar. All Rights Reserved.

VisionLink is a trademark of Trimble Navigation Limited, registered in the United States and in other countries.

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.
www.cat.com www.caterpillar.com

AEXQ2458-01
Replaces AEXQ2458
Build Number: 07B
(Eur, Jpn, Korea, N Am)

